

PRESTIGE

Line

Evolution
line

Wood & Pellet Products

Pocket
01.2024 EN

NORDICA[®]
Extraflame
Warms up your life.



WARMS UP YOUR LIFE, FOR OVER 50 YEARS



DESIGN AND QUALITY, 100% MADE IN ITALY



CLEAN ENERGY, RESPECTING THE PLANET



A REAL SAVING ON THE BILLS



TESTED AND CERTIFIED PRODUCTS



FIND A DEALER, VISIT OUR WEBSITE:
www.lanordica-extraflame.com

INDEX

PELLET PRODUCTS

| | |
|-------------------------|----|
| VENTILATED STOVES | 2 |
| DUCTED STOVES | 5 |
| HEATING STOVES | 8 |
| PELLET INSERTS | 10 |
| BOILERS | 12 |



| | |
|-------------------------|----|
| VENTILATED STOVES | 14 |
| DUCTED STOVES | 26 |
| HEATING STOVES | 33 |



| | |
|-----------------------------|----|
| VENTILATED STOVES | 35 |
| DUCTED STOVES | 42 |
| HYBRID STOVES | 47 |
| HEATING STOVES | 49 |
| BOILERS | 55 |
| HOME CONTROL SOLUTION | 58 |

WOOD STOVES

| | |
|------------------------------------------|----|
| HIGH PERFORMANCE | 60 |
| CAST IRON | 62 |
| EVERGREEN STOVES | 65 |
| HEATING STOVES | 68 |
| EVERGREEN COOKERS | 70 |
| COOKERS FOR INSERTION | 75 |
| THERMO-COOKERS | 77 |
| CAST IRON / CRYSTAL / WIDE INSERTS | 78 |
| MONOBLOCKS | 81 |
| CLOSED FIREPLACES | 82 |



| | |
|------------------|----|
| STOVES | 83 |
| COOKERS | 92 |
| FIREPLACES | 96 |



| | |
|-----------------------------------|-----|
| STOVES | 98 |
| MAKING THE RIGHT CHOICE | 102 |
| PELLET PRODUCTS INDEX | 103 |
| WOOD-BURNING PRODUCTS INDEX | 107 |
| CERTIFICATES | 110 |
| LEGEND | 111 |
| ENERGY LABEL | 111 |
| COLOURS | 111 |

PELLET

STOVES



La Nordica-Extraflame ventilated pellet stoves are the ideal solution for transforming your room into a warm and welcoming place.


Our ducted pellet stoves are studied and designed to bring the hot air produced also in other rooms and allow you to easily manage temperatures, ignitions and time ranges.

By connecting it to your heating system, the thermo stoves become the beating heart of your home by heating the radiators ecologically and efficiently.

VENTILATED PELLET STOVES



ALL THE HEAT YOUR ROOM NEEDS

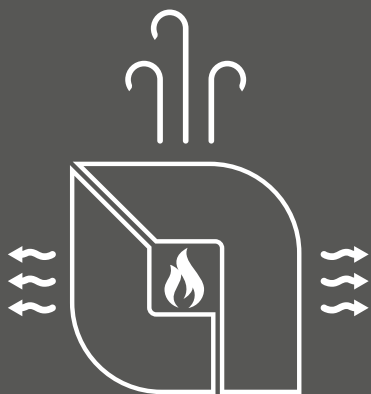

LUISELLA (SLIM)

A+



Black

| | |
|-----------------------|----------------|
| kW-N (min-max) | 2,4 - 4,4 |
| % (min-max) | 94,4 - 91,9 |
| m³ | 126 |
| kg/h (min-max) | 0,5 - 1,0 |
| Dim. WxHxD | 572x892x307 |
| kg | 64 |
| Ø mm | 80 B/T |
| W (min-max) | 27 - 34 |
| kg/ℓ | ~10 kg / ~16 ℓ |



Bordeaux

KETTYEVO 2.0

A+



White

| | |
|-----------------------|----------------|
| kW-N (min-max) | 2,5 - 6,5 |
| % (min-max) | 89,9 - 90,7 |
| m³ | 187 |
| kg/h (min-max) | 0,6 - 1,5 |
| Dim. WxHxD | 456x884x479 |
| kg | 77 |
| Ø mm | 80 B |
| W (min-max) | 25 - 70 |
| kg/ℓ | ~15 kg / ~24 ℓ |



Bordeaux



Black



Parchment *

GIUSYEVO 2.0

A+



White

| | |
|-----------------------|----------------|
| kW-N (min-max) | 3,0 - 7,0 |
| % (min-max) | 90,0 - 91,0 |
| m³ | 201 |
| kg/h (min-max) | 0,7 - 1,6 |
| Dim. WxHxD | 498x1022x490 |
| kg | 92 |
| Ø mm | 80 B/T |
| W (min-max) | 35 - 60 |
| kg/ℓ | ~15 kg / ~24 ℓ |



Bordeaux



Black



Parchment *

* While stocks last

VENTILATED PELLET STOVES



SERAFINA LUX EVO

A+



Bordeaux

kW-N (min-max) 2,5 - 8,0
% (min-max) 92,5 - 91,3
m³ 230
kg/h (min-max) 0,6 - 1,8
Dim. WxHxD 502x1037x530
kg 116
Ø mm 80 B/T
W (min-max) 25 - 60
kg/ℓ ~15 kg / ~24 ℓ



White

SERAFINA PETRA EVO

A+



Natural Stone

kW-N (min-max) 2,5 - 8,0
% (min-max) 92,5 - 91,3
m³ 230
kg/h (min-max) 0,6 - 1,8
Dim. WxHxD 502x1037x530
kg 131
Ø mm 80 B/T
W (min-max) 25 - 60
kg/ℓ ~15 kg / ~24 ℓ

AMIKA

(Air-tight)

A+



White

kW-N (min-max) 2,5 - 8,0
% (min-max) 92,6 - 91,2
m³ 230
kg/h (min-max) 0,6 - 1,8
Dim. WxHxD 460x1200x465
kg 121 - PT 124
Ø mm 80 B
W (min-max) 19 - 62
kg/ℓ ~15 kg / ~24 ℓ



Black



Natural Stone (PT)

KLAUDIA

A+



Ivory

kW-N (min-max) 2,5 - 8,0
% (min-max) 92,5 - 91,3
m³ 230
kg/h (min-max) 0,6 - 1,8
Dim. WxHxD 498x1017x538
kg 99
Ø mm 80 B/T
W (min-max) 25-60
kg/ℓ ~15 kg / ~24 ℓ



Bordeaux



Black

VENTILATED PELLET STOVES



TEODORA EVO

A+



Black

| | |
|-----------------------|----------------|
| kW-N (min-max) | 2,5 - 8,0 |
| % (min-max) | 94,0 - 90,8 |
| m³ | 229 |
| kg/h (min-max) | 0,5 - 1,8 |
| Dim. WxHxD | 610x739x644 |
| kg | 139 |
| Ø mm | 80 B |
| W (min-max) | 35 - 70 |
| kg/ℓ | ~14 kg / ~22 ℓ |

DAHIANA VFS

A+



Bordeaux

| | |
|-----------------------|----------------|
| kW-N (min-max) | 3,0 - 10,0 |
| % (min-max) | 90,2 - 91,0 |
| m³ | 287 |
| kg/h (min-max) | 0,7 - 2,3 |
| Dim. WxHxD | 525x1080x602 |
| kg | 157 |
| Ø mm | 80 B |
| W (min-max) | 20 - 90 |
| kg/ℓ | ~30 kg / ~48 ℓ |



Ivory

Bronze

Black

TEOREMA

A+



Ivory

| | |
|-----------------------|----------------|
| kW-N (min-max) | 3,0 - 10,0 |
| % (min-max) | 90,2 - 91,0 |
| m³ | 287 |
| kg/h (min-max) | 0,7 - 2,3 |
| Dim. WxHxD | 525x1080x652 |
| kg | 165 |
| Ø mm | 80 mm B/T |
| W (min-max) | 20 - 105 |
| kg/ℓ | ~30 kg / ~48 ℓ |



Bordeaux

Black

LUCIA

A+



White


| | |
|-----------------------|----------------|
| kW-N (min-max) | 3,6 - 12,1 |
| % (min-max) | 92,8 - 92,5 |
| m³ | 347 |
| kg/h (min-max) | 0,8 - 2,7 |
| Dim. WxHxD | 556x1097x597 |
| kg | 181 kg |
| Ø mm | 80 B |
| W (min-max) | 23 - 87 |
| kg/ℓ | ~27 kg / ~43 ℓ |




Bordeaux

Taupe

DUCTED PELLET STOVES



WARMTH IN EVERY ROOM

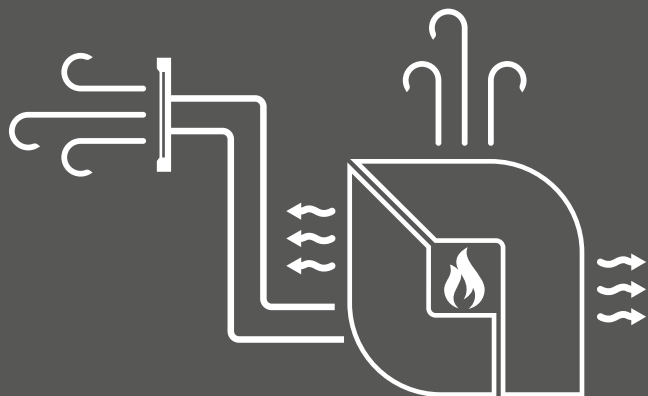

GIUSY PLUS EVO 2.0

A+



White

| | |
|-----------------------|----------------|
| kW-N (min-max) | 3,0 - 7,5 |
| % (min-max) | 90,3 - 91,4 |
| m³ | 215 |
| kg/h (min-max) | 0,7 - 1,7 |
| Dim. WxHxD | 498x1022x490 |
| kg | 96 |
| Ø mm | 80 B/T |
| W (min-max) | 55 - 90 |
| kg/ℓ | ~15 kg / ~24 ℓ |



Bordeaux



Black

KLAUDIA PLUS

A+



Ivory

| | |
|-----------------------|----------------|
| kW-N (min-max) | 2,5 - 8,0 |
| % (min-max) | 92,6 - 91,2 |
| m³ | 230 |
| kg/h (min-max) | 0,6 - 1,8 |
| Dim. WxHxD | 498x1017x538 |
| kg | 103 |
| Ø mm | 80 B/T |
| W (min-max) | 42 - 85 |
| kg/ℓ | ~15 kg / ~24 ℓ |



Bordeaux



Black

MARILENA PLUS AD (SLIM)

A+



Natural Stone

| | |
|-----------------------|----------------|
| kW-N (min-max) | 3,7 - 8,0 |
| % (min-max) | 93,3 - 91,0 |
| m³ | 230 |
| kg/h (min-max) | 0,8 - 1,8 |
| Dim. WxHxD | 750x1077x352 |
| kg | 119 - PT 155 |
| Ø mm | 80 B/T/LH Side |
| W (min-max) | 36 - 85 |
| kg/ℓ | ~15 kg / ~24 ℓ |




White



Black

DUCTED PELLET STOVES



MARILENA PLUS AD CRYSTAL (SLIM)

A+



White

kW-N (min-max) 3,7 - 8,0
% (min-max) 93,3 - 91,0
m³ 230
kg/h (min-max) 0,8 - 1,8
Dim. WxHxD 750x1077x352
kg 135
Ø mm 80 B/T/LH Side
W (min-max) 36 - 85
kg/ℓ ~15 kg / ~24 ℓ



Smoked

ANNABELLA AD EVO (SLIM)

A+



White

kW-N (min-max) 3,4 - 9,0
% (min-max) 93,5 - 91,9
m³ 258
kg/h (min-max) 0,8 - 2,0
Dim. WxHxD 703x1078x343
kg 132
Ø mm 80 B/T/RH Side
W (min-max) 35 - 55
kg/ℓ ~14 kg / ~22 ℓ



Black



Matt Taupe

DAHIANA PLUS VFS

A+



Bordeaux

kW-N (min-max) 3,0 - 10,0
% (min-max) 89,6 - 91,6
m³ 287
kg/h (min-max) 0,7 - 2,3
Dim. WxHxD 525x1080x602
kg 160
Ø mm 80 B
W (min-max) 35 - 130
kg/ℓ ~30 kg / ~48 ℓ



Ivory



Bronze



Black

SOUVENIR STEEL EVO (SLIM)

A+



Bordeaux

kW-N (min-max) 3,4 - 10,2
% (min-max) 93,0 - 90,8
m³ 293
kg/h (min-max) 0,8 - 2,3
Dim. WxHxD 821x1124x343
kg 141
Ø mm 80 B/T/RH Side
W (min-max) 39 - 65
kg/ℓ ~19 kg / ~30 ℓ




White



Black

DUCTED PELLET STOVES



SOUVENIR LUX EVO (SLIM)

A+



White

kW-N (min-max) 3,4 - 10,2
% (min-max) 93,0 - 90,8
m³ 293
kg/h (min-max) 0,8 - 2,3
Dim. WxHxD 822x1162x343
kg 149
Ø mm 80 B/T/RH Side
W (min-max) 39 - 65
kg/ℓ ~19 kg / ~30 ℓ



Bordeaux

Taupe

SOUVENIR PETRA EVO (SLIM)

A+



Natural Stone

kW-N (min-max) 3,4 - 10,2
% (min-max) 93,0 - 90,8
m³ 293
kg/h (min-max) 0,8 - 2,3
Dim. WxHxD 821x1124x343
kg 156
Ø mm 80 B/T/RH Side
W (min-max) 39 - 65
kg/ℓ ~19 kg / ~30 ℓ

TEOREMA PLUS

A+



Ivory

kW-N (min-max) 3,5 - 12,0
% (min-max) 90,5 - 92,1
m³ 344
kg/h (min-max) 0,8 - 2,7
Dim. WxHxD 525x1080x652
kg 177
Ø mm 80 B/T
W (min-max) 42 - 130
kg/ℓ ~27 kg / ~43 ℓ

• Doble ducting system



Bordeaux

Black

LUCIA PLUS

A+



White

kW-N (min-max) 3,6 - 12,0
% (min-max) 91,7 - 91,6
m³ 344
kg/h (min-max) 0,8 - 2,7
Dim. WxHxD 556x1097x597
kg 186
Ø mm 80 B
W (min-max) 50 - 142
kg/ℓ ~27 kg / ~43 ℓ

• Doble ducting system




Bordeaux

Taupe

PELLET HEATING STOVES

THE BEAUTY OF THE FIRE, THE POWER OF A BOILER

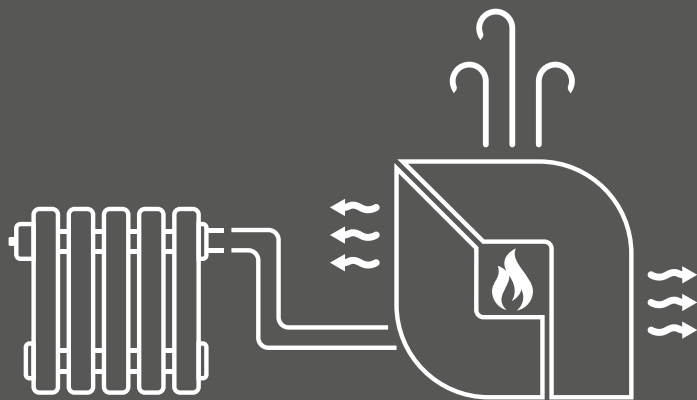

MARINA IDRO H11

A+



| | |
|------------------------------------|------------------|
| kW-N (min-max) | 4,2 - 14,8 |
| kW-H₂O (min-max) | 3,0 - 11,0 |
| % (min-max) | 93,8 - 92,9 |
| m³ | 425 |
| kg/h (min-max) | 0,9 - 3,3 |
| Dim. WxHxD | 550x1039x601 |
| kg | 180 |
| Ø mm | 80 B |
| W (min-max) | 32 - 65 |
| kg/ℓ | ~ 20 kg / ~ 32 ℓ |
| bar | 3 |



Bordeaux



Bronze

MARINA IDRO H13

A+



| | |
|------------------------------------|------------------|
| kW-N (min-max) | 5,1 - 17,5 |
| kW-H₂O (min-max) | 3,7 - 13,0 |
| % (min-max) | 94,2 - 92,4 |
| m³ | 502 |
| kg/h (min-max) | 1,1 - 3,8 |
| Dim. WxHxD | 550x1149x601 |
| kg | 190 |
| Ø mm | 80 B |
| W (min-max) | 25 - 70 |
| kg/ℓ | ~ 24 kg / ~ 32 ℓ |
| bar | 3 |



Ivory



Bordeaux

VIRNA IDRO

A+

(Air-tight)



| | |
|------------------------------------|-----------------|
| kW-N (min-max) | 4,3 - 14,5 |
| kW-H₂O (min-max) | 3,7 - 12,3 |
| % (min-max) | 95,2 - 93,0 |
| m³ | 415 |
| kg/h (min-max) | 0,9 - 3,2 |
| Dim. WxHxD | 793x1105x384 |
| kg | 151 |
| Ø mm | 100 B/T/RH Side |
| W (min-max) | 65 - 80 |
| kg/ℓ | ~22 kg / ~35 ℓ |
| bar | 2,5 |



Bordeaux



Matt Taupe

PELLET HEATING STOVES

COSTANZA IDRO

A+

(Air-tight)



White

kW-N (min-max) 4,8 - 17,0
kW-H₂O (min-max) 2,7 - 12,0
% (min-max) 92,2 - 91,9
m³ 487
kg/h (min-max) 1,1 - 3,8
Dim. WxHxD 495x1153x593
kg 165
Ø mm 100 B
W (min-max) 70 - 100
kg/ℓ ~ 27 kg / ~43 ℓ
bar 3



Bordeaux

ISIDE IDRO H15

A+



Bordeaux

kW-N (min-max) 5,4 - 18,1
kW-H₂O (min-max) 4,3 - 15,0
% (min-max) 92,8 - 94,3
m³ 519
kg/h (min-max) 1,2 - 4,0
Dim. WxHxD 690x1196x628
kg 255
Ø mm 100 B
W (min-max) 65 - 70
kg/ℓ ~35 kg / ~56 ℓ
bar 3



Parchment



White



Amethyst

RAFFAELLA IDRO H15

A+



White

kW-N (min-max) 5,4 - 18,1
kW-H₂O (min-max) 4,3 - 15,0
% (min-max) 92,8 - 94,3
m³ 519
kg/h (min-max) 1,2 - 4,0
Dim. WxHxD 633x1176x626
kg 214
Ø mm 100 B
W (min-max) 65 - 70
kg/ℓ ~ 35 kg / ~56 ℓ
bar 3



Bordeaux



Grigio Luce

RAFFAELLA IDRO H18

A+



Grigio Luce

kW-N 5,4 - 21,7
kW-H₂O 4,3 - 18,0
% 92,8 - 93,8
m³ 623
kg/h 1,2 - 4,8
Dim. WxHxD 633x1176x626
kg 214
Ø mm 100 B
W 65 - 70
kg/ℓ ~35kg / ~56 ℓ
bar 3



Ivory

PELLET HEATING STOVES

DIADEMA IDRO EVO

A+



| | |
|------------------------------------|-----------------|
| kW-N (min-max) | 8,0 - 28,0 |
| kW-H₂O (min-max) | 6,0 - 24,1 |
| % (min-max) | 90,7 - 90,9 |
| m³ | 803 |
| kg/h (min-max) | 1,9 - 6,4 |
| Dim. WxHxD | 619x1304x698 |
| kg | 257 |
| Ø mm | 120 B |
| W (min-max) | 100 - 120 |
| kg/ℓ | ~ 53 kg / ~84 ℓ |
| bar | 2,5 |

PELLET INSERTS


COMFORT P70 AIR H49

A+

(Ventilated)



| | |
|-----------------------|-----------------|
| kW-N (min-max) | 3,0 - 8,0 |
| % (min-max) | 92,6 - 91,4 |
| m³ | 230 |
| kg/h (min-max) | 0,7 - 1,8 |
| Dim. WxHxD | 680x480x512 |
| kg | 113 |
| Ø mm | 80 T |
| W (min-max) | 25 - 95 |
| kg/ℓ | ~ 11 kg / ~18 ℓ |




COMFORT P70 AIR

A+

(Ventilated)




| | |
|-----------------------|-----------------|
| kW-N (min-max) | 3,0 - 10,0 |
| % (min-max) | 90,4 - 90,9 |
| m³ | 287 |
| kg/h (min-max) | 0,7 - 2,2 |
| Dim. WxHxD | 670x530x561 |
| kg | 125 |
| Ø mm | 80 T |
| W (min-max) | 23 - 75 |
| kg/ℓ | ~ 15 kg / ~24 ℓ |

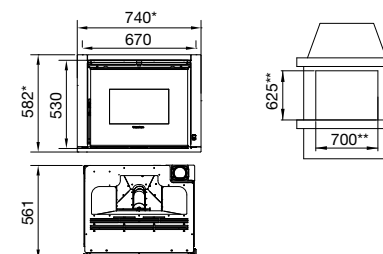

* Dimensions with frame

** Dimensions of compartment with pellet loading drawer

PELLET INSERTS




COMFORT P85

(Ventilated)

A+



| | |
|-----------------------|-----------------|
| kW-N (min-max) | 3,5 - 12,0 |
| % (min-max) | 91,3 - 91,8 |
| m³ | 344 |
| kg/h (min-max) | 0,8 - 2,6 |
| Dim. WxHxD | 814x550x636 |
| kg | 145 |
| Ø mm | 80 T |
| W (min-max) | 25 - 100 |
| kg/ℓ | ~ 16 kg / ~25 ℓ |

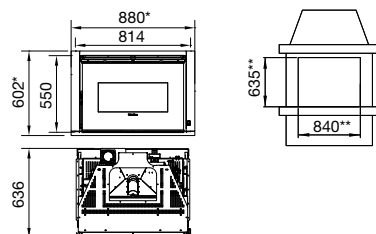


COMFORT P70 AIR PLUS

(Ducting system)

A+



| | |
|-----------------------|-----------------|
| kW-N (min-max) | 3,0 - 10,0 |
| % (min-max) | 91,5 - 92,2 |
| m³ | 287 |
| kg/h (min-max) | 0,7 - 2,2 |
| Dim. WxHxD | 670x530x562 |
| kg | 131 |
| Ø mm | 80 T |
| W (min-max) | 35 - 105 |
| kg/ℓ | ~ 13 kg / ~21 ℓ |

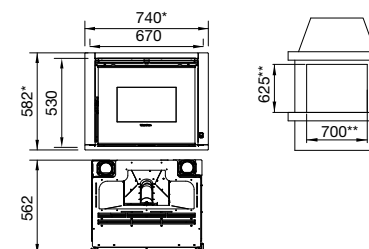


COMFORT P85 PLUS

(Ducting system)

A+



| | |
|-----------------------|-----------------|
| kW-N (min-max) | 3,5 - 12,0 |
| % (min-max) | 92,0 - 91,1 |
| m³ | 344 |
| kg/h (min-max) | 0,8 - 2,6 |
| Dim. WxHxD | 814x550x636 |
| kg | 160 |
| Ø mm | 80 T |
| W (min-max) | 75 - 150 |
| kg/ℓ | ~ 16 kg / ~25 ℓ |

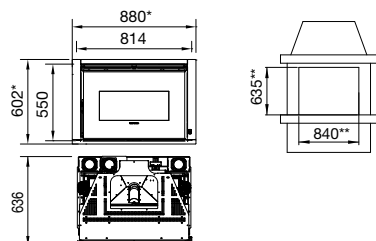


COMFORT IDRO L80

(Ventilated)

A+




| | |
|------------------------------------|-----------------|
| kW-N (min-max) | 5,7 - 19,0 |
| kW-H₂O (min-max) | 4,3 - 14,9 |
| % (min-max) | 91,6 - 90,4 |
| m³ | 545 |
| kg/h (min-max) | 1,3 - 4,3 |
| Dim. WxHxD | 821x648x608 |
| kg | 220 |
| Ø mm | 100 T |
| W (min-max) | 80 - 100 |
| kg/ℓ | ~ 18 kg / ~29 ℓ |
| bar | 2,5 |

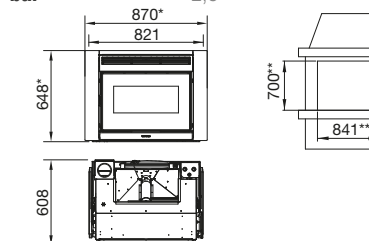


* Dimensions with frame

** Dimensions of compartment with pellet loading drawer

PELLET BOILERS



A FORCE OF NATURE IN THE SERVICE OF YOUR HOME

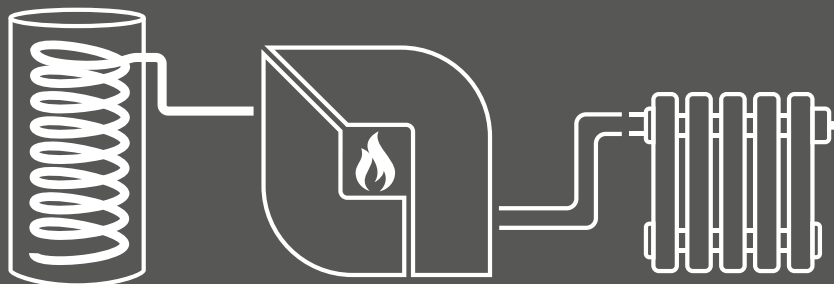

PK15

A+



| | |
|------------------------------------|-------------------|
| kW-N (min-max) | 4,1 - 15,0 |
| kW-H₂O (min-max) | 4,1 - 15,0 |
| % (min-max) | 87,7 - 93,0 |
| m³ | 430 |
| kg/h (min-max) | 1,0 - 3,4 |
| Dim. WxHxD | 822x1398x745 |
| kg | 295 |
| Ø mm | 100 B/LH Side |
| W (min-max) | 60 - 65 |
| kg/ℓ | ~ 75 kg / ~ 119 ℓ |
| bar | 3 |

PK20

A+



| | |
|------------------------------------|-------------------|
| kW-N (min-max) | 5,7 - 20,0 |
| kW-H₂O (min-max) | 5,7 - 20,0 |
| % (min-max) | 88,4 - 92,4 |
| m³ | 573 |
| kg/h (min-max) | 1,4 - 4,6 |
| Dim. WxHxD | 822 x 1398 x 745 |
| kg | 295 |
| Ø mm | 100 B/LH Side |
| W (min-max) | 60 - 65 |
| kg/ℓ | ~ 75 kg / ~ 119 ℓ |
| bar | 3 |


PK30

A+



| | |
|------------------------------------|-------------------|
| kW-N (min-max) | 8,9 - 30,0 |
| kW-H₂O (min-max) | 8,9 - 30,0 |
| % (min-max) | 92,7 - 92,4 |
| m³ | 860 |
| kg/h (min-max) | 2,0 - 6,8 |
| Dim. WxHxD | 892x1398x745 |
| kg | 310 |
| Ø mm | 120 B/LH Side |
| W (min-max) | 70 - 85 |
| kg/ℓ | ~ 75 kg / ~ 119 ℓ |
| bar | 3 |

BOILERS AND THERMO PRODUCTS



It is important to seek the guidance of a qualified technician who is able to recommend the most suitable type of boiler or heating device.

By way of providing generic information, we highlight below the main information one must have in order to make an informed decision when choosing an appliance:

- Thermal requirements of the home
- Type of existing heating system: radiators, fan coil units, or radiant panels
- Type of distribution system: one-pipe, two-pipe or manifolds
- Indication of whether, in addition to heating, the boiler is also intended for the production of domestic hot water
- Any set-up for or installation of thermal solar collectors
- Most suitable type of storage: DHW storage tank or puffer

Accordingly, it is important to seek the guidance of a qualified technician who is able to perform a precise analysis of the system, provide explanations to any questions, including regulation requirements for installation, and recommend the most suitable type of boiler.

A correctly designed therefore guarantees:

- complete safety of one's home
- maximum comfort
- high yield of heat generator
- maximum savings
- less wear to the parts and therefore longer service life of the appliance



PRESTIGE

Line

PERFECT SYMBIOSIS

OF DESIGN

AND WARMTH

New 2024

A⁺ | **5,1** kW-N** | **146** m³**

CHARACTERISTICS



- Airtight stove
- The hearth can be removed by authorised service personnel
- FPC Plus function
- Easy Setup
- Easy Control
- Weekly chronothermostat

OPTIONAL



PEGGY WITH 'CLASSIC' PEDESTAL
Dimensions 545x720x570



PEGGY WITH 'STYLE' PEDESTAL
Dimensions 514x720x570




Image referring to Peggy without pedestal
Cavity dimensions for product insertion (450x900 mm)

TECHNICAL DATA

Nominal power (min-max)
2,5 - 5,1 kW-N **

Efficiency (min-max)
> 87,0 % **

Hourly consumption (min-max)
0,54 - 1,15 kg/h **

Dimensions (WxHxD)
500 x 620 x 570 **


Net weight
** kg

Smoke outlet diameter (Ø)
80 mm B **

Tank total capacity
~10 kg / ~16 ℓ **

Electric consumption (min-max)
** W

TECHNOLOGY

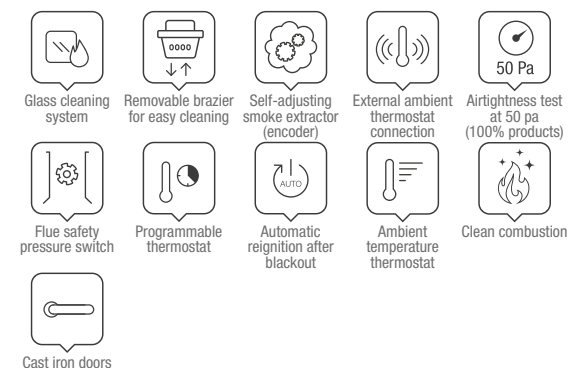

ECODESIGN**



Download
Technical Sheet



SCAN ME



COLOUR CHOICES

Painted steel and enamelled cast iron cladding



black

STANDARD EQUIPMENT



REMOTE CONTROL
Backlit IR touch remote control



BLACK LCD

A+ | 7,0 kW-N | 201 m³

CHARACTERISTICS



- Output smoke outlet possibilities: rear, upper
- Radiant surface heat exchanger
- Extractable burn pot for easy cleaning
- Easy Control
- Easy Setup

ECODESIGN



Download
Technical Sheet



SCAN ME

TECHNICAL DATA

Nominal power (min-max)
2,5 - 7,0 kW-N

Efficiency (min-max)
94,3 - 91,3 %

Hourly consumption (min-max)
0,6 - 1,5 kg/h

Dimensions (WxHxD)
478 x 914 x 522 mm


Net weight
90 kg

Smoke outlet diameter (Ø)
80 mm B/T

Tank total capacity
~11 kg / ~18 l

Electric consumption (min-max)
26 - 62 W

TECHNOLOGY

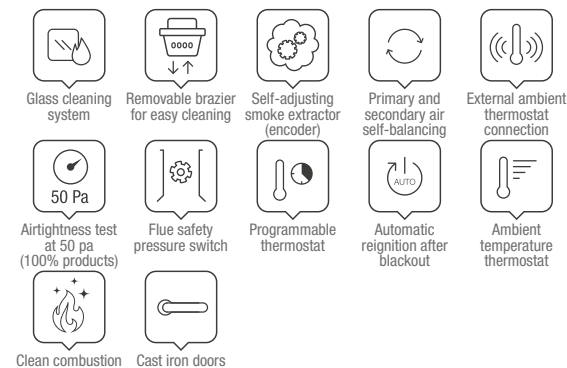

COLOUR CHOICES

High temperature painted steel covering



Black

STANDARD EQUIPMENT



REMOTE CONTROL
Backlit IR touch remote control



BLACK LCD

SABRY 5.0

Ventilated pellet stove

PRESTIGE

Line

A⁺ | 7,0 kW-N | 201 m³

ECODESIGN

Download
Technical Sheet



SCAN ME

CHARACTERISTICS



- Output smoke outlet possibilities: rear
- Radiant surface heat exchanger
- Ergonomic handle
- Extractable burn pot for easy cleaning
- Ceramic glow plug for quick ignition
- FPC PLUS - besides the work carried out by FPC, it allows abnormal situations to be noted by setting the generator in safe conditions.
- Easy Setup
- Easy Control



TECHNICAL DATA

Nominal power (min-max)

2,8 - 7,0 kW-N

Efficiency (min-max)

94,5 - 90,8 %

Hourly consumption (min-max)

0,6 - 1,6 kg/h

Dimensions (WxHxD)

456 x 924 x 555 mm

Net weight

87 kg

Smoke outlet diameter (Ø)

80 mm B


Tank total capacity

~15 kg / ~24 ℓ

Electric consumption (min-max)

27 - 60 W

TECHNOLOGY

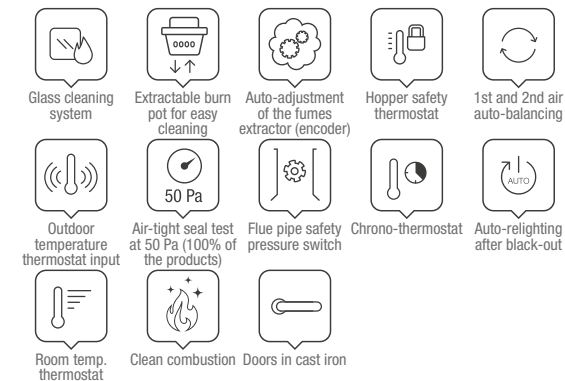

COLOUR CHOICES

High temperature painted steel covering



Ivory

Black

Bronze

STANDARD EQUIPMENT



REMOTE CONTROL

Backlit IR touch remote control



BLACK LCD

MOIRA EVO



Airtight, ventilated pellet stove

PRESTIGE

Line

A⁺ | 7,0 kW-N | 201 m³

CHARACTERISTICS



- Output smoke outlet possibilities: rear
- Emergency module
- Extractable burn pot for easy cleaning

ECODESIGN



Download
Technical Sheet



SCAN ME



TECHNICAL DATA

Nominal power (min-max)

2,5 - 7,0 kW-N

Efficiency (min-max)

94,3 - 91,3 %

Hourly consumption (min-max)

0,6 - 1,5 kg/h

Dimensions (WxHxD)

463 x 893 x 528 mm

Net weight

84 kg

Smoke outlet diameter (Ø)

80 mm B


Tank total capacity

~11 kg / ~18 l

Electric consumption (min-max)

30 - 60 W

TECHNOLOGY

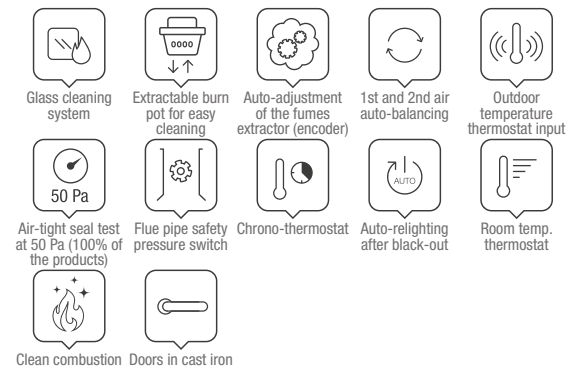

COLOUR CHOICES

High temperature painted steel covering and majolica top cover



White

Black

STANDARD EQUIPMENT

RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function



A⁺ | 7,0 kW-N | 201 m³

CHARACTERISTICS



- Smoke discharge outlet option: upper
- Removable brazier for easy cleaning
- Room temperature control with AUTOMATIC function
- Home automation integration with "Alexa"
- Easy Control
- Easy Setup



Tab for opening the door

TECHNICAL DATA

Nominal power (min. - max.)

2,5 - 7,0 kW-N

Efficiency (min. - max.)

94,3 - 91,3 %

Hourly consumption (min. - max.)

0,6 - 1,5 kg/h

Dimensions (WxHxD)

506 x 897 x 525 mm

Net weight

91 kg

Smoke outlet diameter (Ø)

80 mm T

Tank total capacity

~11 kg / ~18 l

Electric consumption (min. - max.)

26 - 62 W

TECHNOLOGY



ECODESIGN



Download
technical data sheet



SCAN ME



FINISHES

Painted steel two-tone cladding



White

Bronze

Black

STANDARD EQUIPMENT



RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function

CONSOLE WITH BUILT-IN WI-FI

("Total Control 3.0" app)



A⁺ | **8,0 kW-N** | **230 m³**

CHARACTERISTICS



- Smoke discharge outlet option: rear, upper
- Radiant surface heat exchanger
- Removable ash compartment
- Home automation integration with "Alexa" (Amazon).N.B. only with "Grey label" WiFi module – optional – and using the App Total Control 3.0. Service and "Alexa" device (Amazon) not included
- FPC – An innovative adaptive system for regulating and maintaining air combustion constant over time
- Easy Control
- Easy Setup

ECODESIGN

Download
technical data sheet



SCAN ME



TECHNICAL DATA

Nominal power (min. - max.)

3,2 - 8,0 kW-N

Efficiency (min. - max.)

92,4 - 91,1 %

Hourly consumption (min. - max.)

0,7 - 1,8 kg/h

Dimensions (WxHxD)

496 x 1014 x 585 mm

Net weight

104 kg

Smoke outlet diameter (Ø)

80 mm B/T


Tank total capacity

~15 kg / ~24 ℓ

Electric consumption (min. - max.)

30 - 60 W

TECHNOLOGY

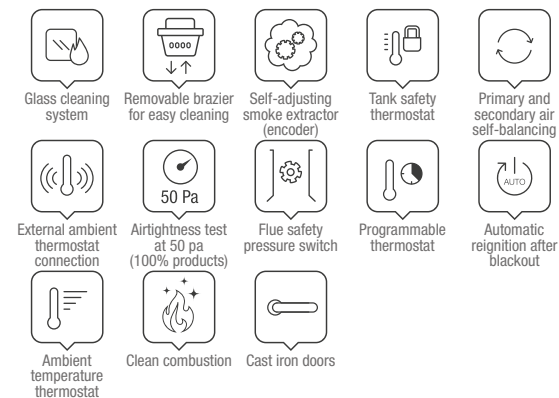

FINISHES

Black painted steel cladding and ceramic or stone front panel



Black

Taupe

Natural stone

STANDARD EQUIPMENT



REMOTE CONTROL

Backlit IR Touch remote control



BLACK LCD

A⁺ | 8,0 kW-N | 230 m³

CHARACTERISTICS



- Removable brazier for easy cleaning
- Removable ash compartment
- Room temperature control with AUTOMATIC function
- Home automation integration with "Alexa"
- Easy Setup
- Easy Control



Thick top

TECHNICAL DATA

Nominal power (min. - max.)

2,5 - 8,0 kW-N

Efficiency (min. - max.)

94,7 - 91,5 %

Hourly consumption (min. - max.)

0,5 - 1,8 kg/h

Dimensions (WxHxD)

507 x 1007 x 558 mm

Net weight

101 kg

Smoke outlet diameter (Ø)

80 mm B


Tank total capacity

~15 kg / ~24 ℓ

Electric consumption (min. - max.)

25 - 60 W

TECHNOLOGY

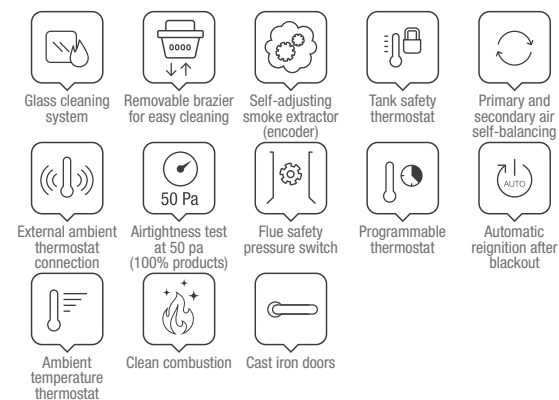

ECODESIGN

Download
technical data sheet



SCAN ME



FINISHES

Painted steel cladding



White

Black

STANDARD EQUIPMENT

RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function



CONSOLE WITH BUILT-IN WI-FI

("Total Control 3.0" app)



ANGELA EVO

 Ventilated and **hermetic** pellet stove

PRESTIGE

Line

A⁺ | 8,0 kW-N | 230 m³

CHARACTERISTICS



- Output smoke outlet possibilities: rear
- Emergency module
- Extractable burn pot for easy cleaning

ECODESIGN



Download
Technical Sheet



SCAN ME

TECHNICAL DATA

Nominal power (min-max)

2,5 - 8,0 kW-N

Efficiency (min-max)

94,7 - 91,5 %

Hourly consumption (min-max)

0,5 - 1,8 kg/h

Dimensions (WxHxD)

490 x 1007 x 528 mm

Net weight

93 kg

Smoke outlet diameter (Ø)

80 mm B


Tank total capacity

~15 kg / ~24 l

Electric consumption (min-max)

25 - 60 W

TECHNOLOGY

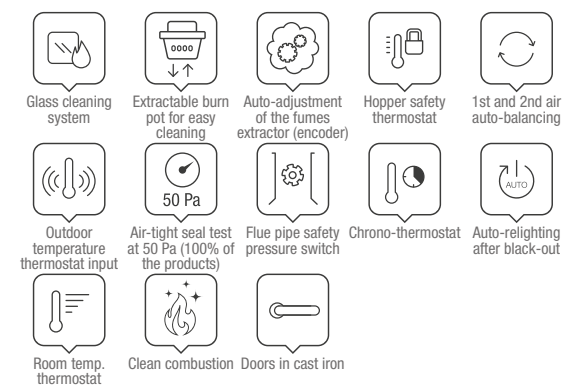

COLOUR CHOICES

High temperature painted steel covering and majolica top cover



Black

White

STANDARD EQUIPMENT

RADIO REMOTE CONTROL


Radio remote control with "handheld device", with thermostat function





A⁺ | 8,0 kW-N | 230 m³

CHARACTERISTICS

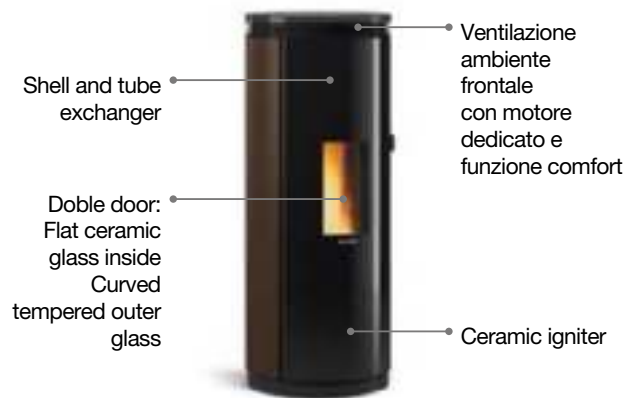

- Output smoke outlet possibilities: rear aligned
- Hearth, door fire and brazier in cast iron
- Emergency module
- Extractable burn pot for easy cleaning
- Extractable Ash compartment

ECODESIGN



Download
Technical Sheet



SCAN ME

TECHNICAL DATA

Nominal power (min-max)

2,5 - 8,0 kW-N

Efficiency (min-max)

92,6 - 91,2 %

Hourly consumption (min-max)

0,6 - 1,8 kg/h

Dimensions (WxHxD)

470 x 1197 x 470 mm

Net weight

130 kg

Smoke outlet diameter (Ø)

80 mm B


Tank total capacity

~15 kg / ~24 ℓ

Electric consumption (min-max)

28 - 67 W

TECHNOLOGY

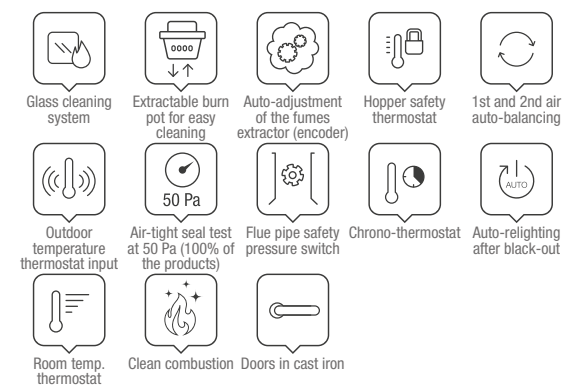

COLOUR CHOICES

High temperature painted steel covering



Bronze

Taupe

STANDARD EQUIPMENT



RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function

OPTIONAL



Kit Glass Night View ROBOX®

PAMELA CRYSTAL - BLSC



Airtight, ventilated pellet stove

PRESTIGE

Line

A⁺ | 8,0 kW-N | 230 m³

ECODESIGN

Download
technical data sheet



SCAN ME

CHARACTERISTICS



- Smoke discharge outlet option: rear on axis
- Cast iron door, hearth and brazier
- Emergency module
- Removable brazier for easy cleaning
- Removable ash compartment



TECHNICAL DATA

Nominal power (min. - max.)

2,5 - 8,0 kW-N

Efficiency (min. - max.)

92,6 - 91,2 %

Hourly consumption (min. - max.)

0,6 - 1,8 kg/h

Dimensions (WxHxD)

470 x 1197 x 470 mm

Net weight

140 kg

Smoke outlet diameter (Ø)

80 mm B

Tank total capacity

~15 kg / ~24 l

Electric consumption (min. - max.)

28 - 67 W

TECHNOLOGY



Glass cleaning system



Removable brazier for easy cleaning



Self-adjusting smoke extractor (encoder)



Tank safety thermostat



Primary and secondary air self-balancing



External ambient thermostat connection



Airtightness test at 50 pa (100% products)



Flue safety pressure switch



Programmable thermostat



Automatic reignition after blackout



Ambient temperature thermostat



Clean combustion



Cast iron doors

FINISHES

Tempered glass cladding



Crystal BLSC

STANDARD EQUIPMENT



RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function

A⁺ | 9,0 kW-N | 258 m³

CHARACTERISTICS



- Shell and tube exchanger
- T tube integrated in the product, inspectable from the rear
- Hearth, door fire and brazier in cast iron
- Emergency module
- Extractable burn pot for easy cleaning
- Extractable ash drawer

ECODESIGN

Download
Technical Sheet



SCAN ME



TECHNICAL DATA

Nominal power (min-max)
3,8 - 9,0 kW-N

Efficiency (min-max)
92,2 - 92,7 %

Hourly consumption (min-max)
0,9 - 2,0 kg/h

Dimensions (WxHxD)
550 x 1200 x 573 mm


Net weight
141 kg
PT 167 kg

Smoke outlet diameter (Ø)
80 mm B/T

Tank total capacity
~18 kg / ~29 ℓ

Electric consumption (min-max)
24 - 62 W

TECHNOLOGY

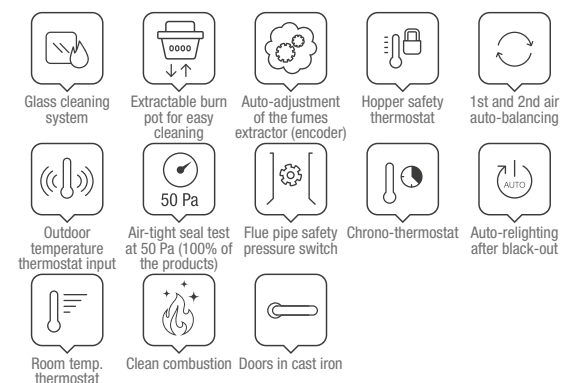

COLOUR CHOICES

High temperature painted steel covering and majolica top cover or natural stone



White

Black

Natural stone (PT)


STANDARD EQUIPMENT

RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function



OPTIONAL



Kit Glass Night View ROBAX®

MIRKA PLUS

Ducted pellet stove

PRESTIGE

Line

A⁺ | **8,0 kW-N** | **230 m³**

CHARACTERISTICS



- Smoke discharge outlet option: rear, upper
- Ducting with dedicated motor up to 8 metres, thermostatically controlled and removable + AIR ZONE CONTROL
- Radiant surface heat exchanger
- Removable ash compartment
- Home automation integration with "Alexa" (Amazon). N.B. only with "Grey label" WiFi module – optional – and using the App Total Control 3.0. Service and "Alexa" device (Amazon) not included
- FPC – An innovative adaptive system for regulating and maintaining air combustion constant over time
- Easy Control
- Easy Setup



UP TO 8 METRES OF DUCTS
through one back output Ø80
(excludable)

ECODESIGN

Download
technical data sheet



SCAN ME



TECHNICAL DATA

Nominal power (min. - max.)

3,2 - 8,0 kW-N

Efficiency (min. - max.)

92,5 - 91,0 %

Hourly consumption (min. - max.)

0,7 - 1,8 kg/h

Dimensions (WxHxD)

496 x 1014 x 585 mm

Net weight

108 kg

Smoke outlet diameter (Ø)

80 mm B/T

Tank total capacity

~15 kg / ~24 l

Electric consumption (min. - max.)

45 - 96 W

TECHNOLOGY



Glass cleaning system



Removable brazier for easy cleaning



Self-adjusting smoke extractor (encoder)



Tank safety thermostat



Primary and secondary air self-balancing



External ambient thermostat connection



Airtightness test at 50 pa (100% products)



Flue safety pressure switch



Programmable thermostat



Automatic reignition after blackout



Ambient temperature thermostat



Clean combustion



Cast iron doors

FINISHES

Black painted steel cladding and ceramic or stone front panel



Black



Taupe



Natural stone

STANDARD EQUIPMENT



REMOTE CONTROL

Backlit IR Touch remote control



BLACK LCD

ANGELA PLUS EVO



Hermetic pellet stove with ducting system

PRESTIGE

Line

A⁺ | 8,0 kW-N | 230 m³

ECODESIGN

Download
Technical Sheet




SCAN ME

CHARACTERISTICS



- Output smoke outlet possibilities: rear
- Ducting system output possibilities (Ø80 mm): rear
- Emergency module
- Extractable burn pot for easy cleaning
- Extractable Ash compartment



UP TO 8 METRES OF DUCTS
through one back output Ø80
(excludable)



TECHNICAL DATA

Nominal power (min-max)

2,5 - 8,0 kW-N

Efficiency (min-max)

94,9 - 91,9 %

Hourly consumption (min-max)

0,5 - 1,8 kg/h

Dimensions (WxHxD)

490 x 1007 x 528 mm

Net weight

98 kg

Smoke outlet diameter (Ø)

80 mm B

Tank total capacity

~15 kg / ~24 ℓ

Electric consumption (min-max)

50 - 80 W

TECHNOLOGY



Glass cleaning system



Extractable burn pot for easy cleaning



Auto-adjustment of the fumes extractor (encoder)



Hopper safety thermostat



1st and 2nd air auto-balancing



Outdoor temperature thermostat input



Air-tight seal test at 50 Pa (100% of the products)



Flue pipe safety pressure switch



Chrono-thermostat



Auto-reighting after black-out



Room temp. thermostat



Clean combustion



Doors in cast iron

COLOUR CHOICES

High temperature painted steel covering and majolica top cover



White



Black

STANDARD EQUIPMENT



RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function

ILARY PLUS TOP



Airtight, ducted pellet stove

PRESTIGE


Line

A⁺ | 8,0 kW-N | 230 m³

CHARACTERISTICS



- Smoke discharge outlet option: upper
- Removable brazier for easy cleaning
- Removable ash compartment
- Shell and tube heat exchanger
- Room temperature control with AUTOMATIC function
- Home automation integration with "Alexa"
- Easy Setup
- Easy Control



UP TO 8 METRES OF DUCTS
through one back output Ø80
(excludable)

ECODESIGN

Download
technical data sheet



SCAN ME



TECHNICAL DATA

Nominal power (min. - max.)

2,5 - 8,0 kW-N

Efficiency (min. - max.)

94,9 - 91,9 %

Hourly consumption (min. - max.)

0,5 - 1,8 kg/h

Dimensions (WxHxD)

507 x 1007 x 558 mm

Net weight

105 kg

Smoke outlet diameter (Ø)

80 mm T

Tank total capacity

~15 kg / ~24 ℓ

Electric consumption (min. - max.)

45 - 75 W

TECHNOLOGY



Glass cleaning system



Removable brazier for easy cleaning



Self-adjusting smoke extractor (encoder)



Tank safety thermostat



Primary and secondary air self-balancing



External ambient thermostat connection



Airtightness test at 50 pa (100% products)



Flue safety pressure switch



Programmable thermostat



Automatic reignition after blackout



Ambient temperature thermostat



Clean combustion



Cast iron doors

FINISHES

Painted steel cladding



White



Black

STANDARD EQUIPMENT



RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function

CONSOLE WITH BUILT-IN WI-FI

("Total Control 3.0" app)



GABRIELLA PLUS



Tight and **hermetic** pellet stove with ducting system

PRESTIGE

Line

A⁺ | 8,0 kW-N | 230 m³


ECODESIGN

Download
Technical Sheet




SCAN ME

CHARACTERISTICS

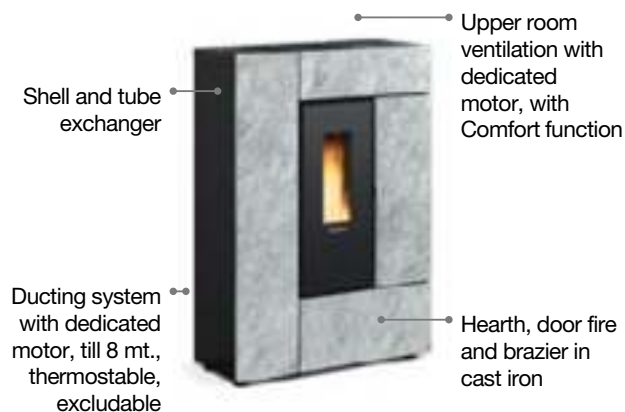

- Output smoke outlet possibilities: upper-backside, upper
- Extractable burn pot for easy cleaning
- Extractable Ash compartment



UP TO 8 METRES OF DUCTS
through one back or left side output Ø80
(excludable)



TECHNICAL DATA

Nominal power (min-max)

3,5 - 8,0 kW-N

Efficiency (min-max)

94,1 - 94,0 %

Hourly consumption (min-max)

0,8 - 1,8 kg/h

Dimensions (WxHxD)

750 x 1077 x 350 mm

Net weight

132 kg

PT 160 kg

Smoke outlet diameter (Ø)

80 mm B/T


Tank total capacity

~15 kg / ~24 ℓ

Electric consumption (min-max)

50 - 90 W

TECHNOLOGY

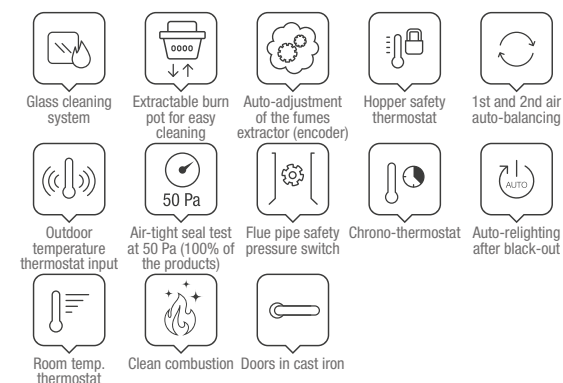

COLOUR CHOICES

High temperature painted steel covering or natural stone



White

Bronze

Natural stone (PT)

STANDARD EQUIPMENT



REMOTE CONTROL

Backlit IR touch remote control



BLACK LCD

DEBBY PLUS EVO




Airtight, ducted pellet stove

PRESTIGE

Line

A⁺ | 9,0 kW-N | 258 m³

CHARACTERISTICS

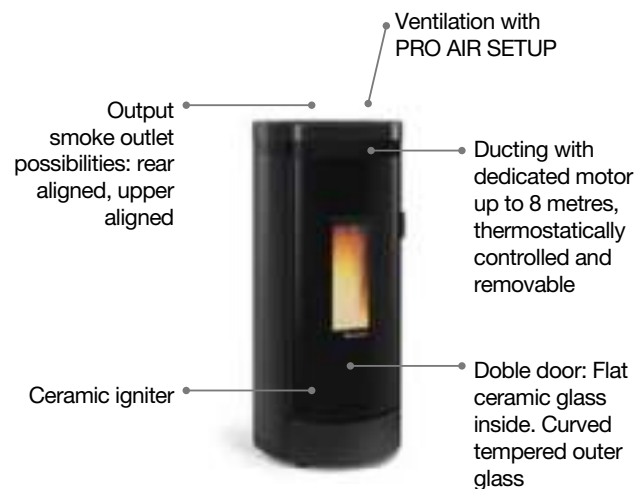

- Shell and tube exchanger
- T tube integrated in the product, inspectable from the rear
- Hearth, door fire and brazier in cast iron
- Safety button
- Extractable ash drawer
- FPC – An innovative adaptive system for regulating and maintaining air combustion constant over time
- FPC PLUS - besides the work carried out by FPC, it allows abnormal situations to be noted by setting the generator in safe conditions.
- With AIR ZONE CONTROL (AZC), the speed of rotation of the ducted fan is controlled in order to maximise the transmission of thermal power in the ducted environment.

ECODESIGN

Download
Technical Sheet



SCAN ME



TECHNICAL DATA

Nominal power (min-max)

3,8 - 9,0 kW-N

Efficiency (min-max)

92,2 - 92,7 %

Hourly consumption (min-max)

0,7 - 2,0 kg/h

Dimensions (WxHxD)

550 x 1199 x 573 mm

Net weight

137 kg
PT 163 kg

Smoke outlet diameter (Ø)

80 mm B/T


Tank total capacity

~18 kg / ~29 ℓ

Electric consumption (min-max)

45 - 92 W

TECHNOLOGY

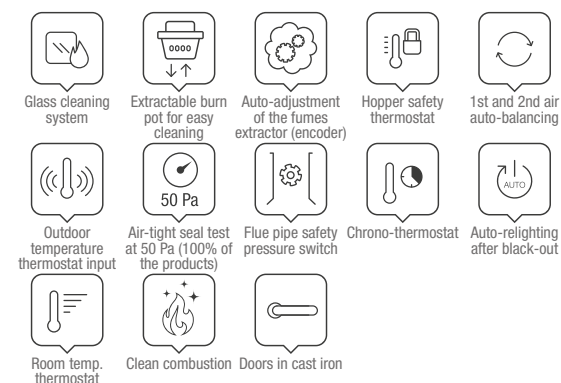

COLOUR CHOICES

High temperature painted steel covering and majolica top cover or natural stone



White

Black

Natural stone (PT)


STANDARD EQUIPMENT

RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function



OPTIONAL



Kit Glass Night View ROBOX®

SHARON PLUS




Tight and **hermetic** pellet stove with ducting system

PRESTIGE

Line

A⁺ | 10,0 kW-N | 287 m³

CHARACTERISTICS

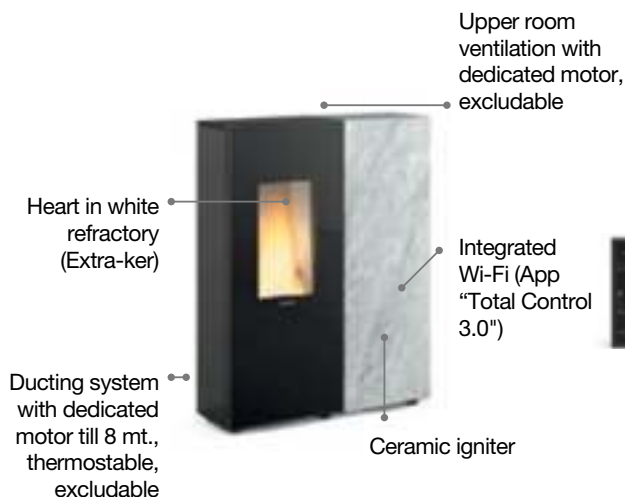

- Extractable burn pot for easy cleaning
- Output smoke outlet possibilities: rear, upper
- Ducting system output possibilities (Ø80 mm): rear
- Radiant surface heat exchanger
- Double door: Glass ceramic external door
- Wide fire vision
- Reduced depth (slim)
- Emergency module
- Ash compartment
- Door fire and brazier in cast iron
- With the AUTOMATIC function activated, the stove manages the power output so that the room temperature set by the user remains constant. This minimises power fluctuations to the benefit of thermal and acoustic comfort
- With AIR ZONE CONTROL (AZC) the speed of rotation of the ducting fan is managed with the aim of maximising the transmission of thermal power in the ducted environment

ECODESIGN



Download
Technical Sheet



SCAN ME

TECHNICAL DATA

Nominal power (min-max)

3,5 - 10,0 kW-N

Efficiency (min-max)

91,7 - 91,0 %

Hourly consumption (min-max)

0,8 - 2,3 kg/h

Dimensions (WxHxD)

900 x 1150 x 290 mm

Net weight

155 kg - PT 167 kg

Smoke outlet diameter (Ø)

80mm B/T


Tank total capacity

~21 kg / ~33 ℓ

Electric consumption (min-max)

30 - 50 W

TECHNOLOGY

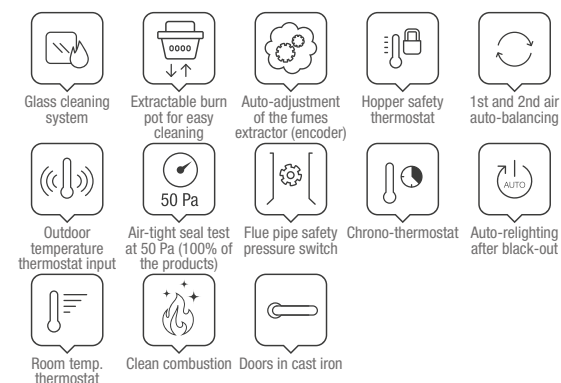

COLOUR CHOICES

Glass or natural stone covered



Crystal

Natural stone (PT)

STANDARD EQUIPMENT

RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function



OPTIONAL

KIT DUCTING

Right side ducting kit



SHARON PLUS STEEL




Airtight, ducted, slim pellet stove

PRESTIGE

Line

A⁺ | 10,0 kW-N | 287 m³

CHARACTERISTICS

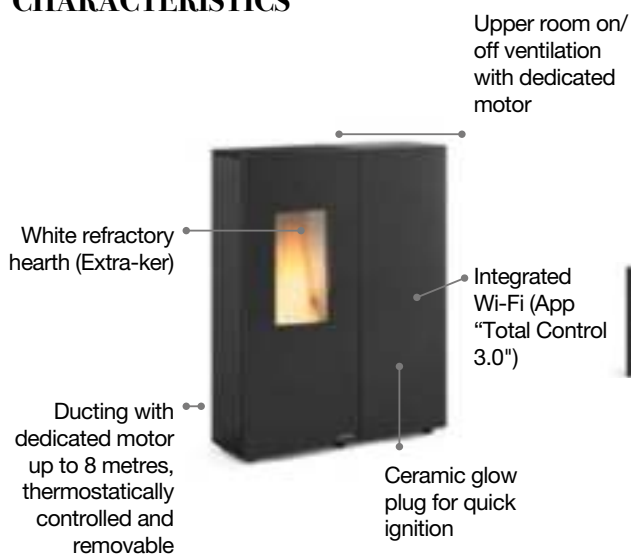


- Removable brazier for easy cleaning
- Smoke discharge outlet option: rear, upper
- Ducting outlet options (Ø80 mm): rear
- Radiant surface heat exchanger
- Double door
- Wide view of the flame
- Reduced depth
- Emergency module
- Ash compartment
- Cast iron door and brazier
- With the AUTOMATIC function activated, the stove manages the power output so that the room temperature set by the user remains constant. This minimises power fluctuations to the benefit of thermal and acoustic comfort
- With AIR ZONE CONTROL (AZC) the speed of rotation of the ducting fan is managed with the aim of maximising the transmission of thermal power in the ducted environment

ECODESIGN



Download
technical data sheet



SCAN ME

TECHNICAL DATA

Nominal power (min. - max.)

3,5 - 10,0 kW-N

Efficiency (min. - max.)

91,7 - 91,0 %

Hourly consumption (min. - max.)

0,8 - 2,3 kg/h

Dimensions (WxHxD)

900 x 1150 x 295 mm

Net weight

155 kg

Smoke outlet diameter (Ø)

80 mm B/T


Tank total capacity

~21 kg / ~33 ℓ

Electric consumption (min. - max.)

30 - 50 W

TECHNOLOGY

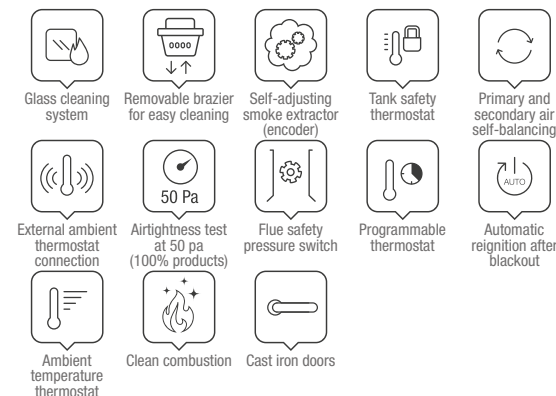

FINISHES

Painted steel cladding



Black

STANDARD EQUIPMENT

RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function



OPTIONAL

KIT DUCTING

Right side ducting kit





A⁺ | 14,2 kW-N | 11,0 kW-H₂O | 407 m³

CHARACTERISTICS



- Pressure transducer and display pressure value indication
- Output smoke outlet possibilities: rear
- Safety valve 3 bar
- Combustion chamber in thick steel
- Air relief valve
- Ergonomic handle
- Door fire and brazier in cast iron
- Thermal and pressure safety
- Expansion tank
- Extractable ash drawer

ECODESIGN

Download
Technical Sheet



SCAN ME



TECHNICAL DATA

Nominal power (min-max)

4,1 - 14,2 kW-N

Power given back to water (min-max)

2,9 - 11,0 kW-H₂O

Efficiency (min-max)

92,9 - 91,1 %

Hourly consumption (min-max)

0,9 - 3,2 kg/h

Dimensions (WxHxD)

511 x 1150 x 632 mm

Net weight

163 kg

Smoke outlet diameter (Ø)

100 mm B

Tank total capacity

~27 kg / ~43 l


Electric consumption (min-max)

65 - 95 W

Working pressure (bar)

3 bar

TECHNOLOGY

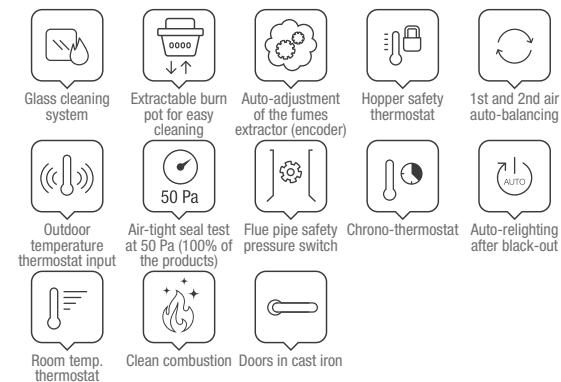

COLOUR CHOICES

High temperature painted steel covering and majolica top cover



Ivory

Bordeaux

Bronze

STANDARD EQUIPMENT



REMOTE CONTROL

Backlit IR touch remote control



BLACK LCD

Evolution
line

THE TECHNOLOGICAL


REVOLUTION OF HEAT



V
E
N
T
I
L
A
T
E
D

P
E
L
L
E
T
S
T
O
V
E

Evolution
life

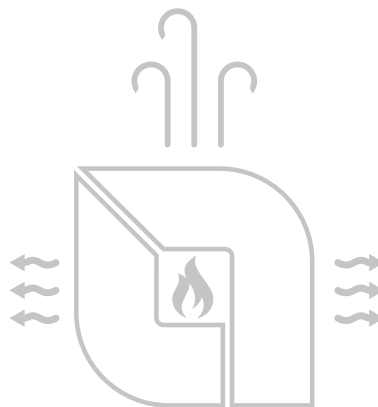

Totally Air-tight

Home control Solution



AIR-TIGHT

SAFE: Air-tight combustion chamber and tank:
technology and innovation at the service of your safety



THE LATEST GENERATION IGNITION SYSTEM

FAST: For immediate warmth in your home, always and everywhere



HOME CONTROL SOLUTION

INNOVATIVE: Always in contact with your stove, even when you are away from home



OPTIMISED COMBUSTION

EFFICIENT: Reduces the waiting time for relighting, ensuring optimal combustion



SELF-CLEANING BRAZIER

CONVENIENT: your stove cleans itself



CONTROL WITH MULTI-FUNCTION RADIO REMOTE CONTROL HANDHELD DEVICE

AGILE: All the control functions of the stove, but also with a remote thermostat



MIETTA EVO



Ventilated and **hermetic** pellet stove

Evolution
life

A⁺ | 9,0 kW-N | 258 m³

CHARACTERISTICS



- Shell and tube exchanger
- Output smoke outlet possibilities: rear
- Combustion chamber probe
- Hearth, door fire and brazier in cast iron
- Emergency module
- Extractable ash drawer
- Possibility to select the power even into the individual slot of chrono

ECODESIGN



Download
Technical Sheet



SCAN ME

TECHNICAL DATA

Nominal power (min-max)

3,4 - 9,0 kW-N

Efficiency (min-max)

93,9 - 93,1 %

Hourly consumption (min-max)

0,8 - 2,0 kg/h

Dimensions (WxHxD)

496 x 1073 x 579 mm

Net weight

157 kg

Smoke outlet diameter (Ø)

80 mm B


Tank total capacity

~20 kg / ~32 ℓ

Electric consumption (min-max)

26 - 43 W

TECHNOLOGY

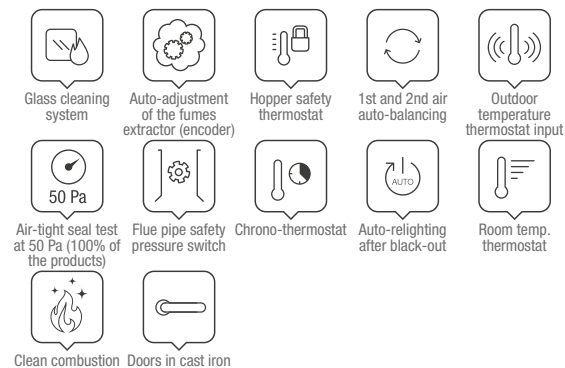

COLOUR CHOICES

High temperature painted steel covering and majolica top cover



Bordeaux

White

STANDARD EQUIPMENT

RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function



KATIA 9



Airtight, ventilated pellet stove

Evolution
line

A⁺ | 9,0 kW-N | 258 m³

CHARACTERISTICS



- Shell and tube heat exchanger
- Cast iron door, hearth and brazier
- Double glass door
- Combustion chamber probe
- Room temperature control with AUTOMATIC function
- Home automation integration with "Alexa"
- Easy Setup
- Easy Control



Curved ceramic glass

TECHNICAL DATA

Nominal power (min. - max.)

3,4 - 9,0 kW-N

Efficiency (min. - max.)

93,9 - 93,1 %

Hourly consumption (min. - max.)

0,8 - 2,0 kg/h

Dimensions (WxHxD)

515 x 1082 x 572 mm

Net weight

155 kg

Smoke outlet diameter (Ø)

80 mm B


Tank total capacity

~20 kg / ~32 ℓ

Electric consumption (min. - max.)

26 - 43 W

TECHNOLOGY

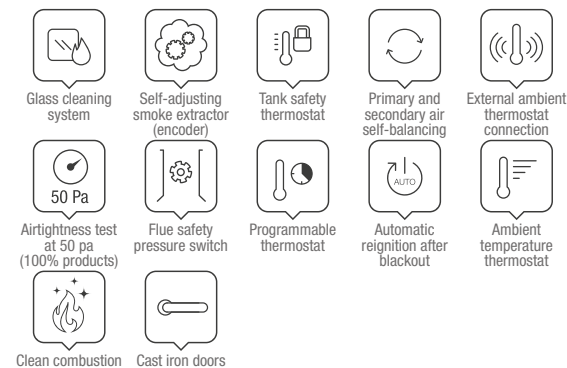

ECODESIGN

Download
technical data sheet



SCAN ME



FINISHES

Painted steel cladding



White

Bronze

Taupe

STANDARD EQUIPMENT

RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function



CONSOLE WITH BUILT-IN WI-FI

("Total Control 3.0" app)



KATIA 11



Airtight, ventilated pellet stove

Evolution
line

A⁺ | 11,0 kW-N | 315 m³

ECODESIGN

Download
technical data sheet



SCAN ME

CHARACTERISTICS



- Shell and tube heat exchanger
- Cast iron door, hearth and brazier
- Double glass door
- Combustion chamber probe
- Room temperature control with AUTOMATIC function
- Home automation integration with "Alexa"
- Easy Setup
- Easy Control



Curved ceramic glass



TECHNICAL DATA

Nominal power (min. - max.)

3,4 - 11,0 kW-N

Efficiency (min. - max.)

93,9 - 91,4 %

Hourly consumption (min. - max.)

0,8 - 2,5 kg/h

Dimensions (WxHxD)

515 x 1082 x 572 mm

Net weight

155 kg

Smoke outlet diameter (Ø)

80 mm B


Tank total capacity

~20 kg / ~32 ℓ

Electric consumption (min. - max.)

26 - 45 W

TECHNOLOGY

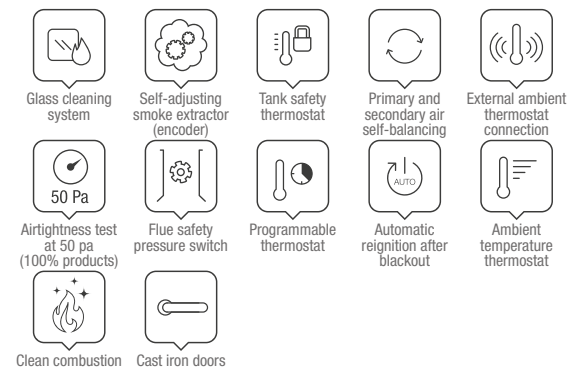

FINISHES

Painted steel cladding



White

Bronze

Taupe

STANDARD EQUIPMENT

RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function



CONSOLE WITH BUILT-IN WI-FI

("Total Control 3.0" app)



A⁺ | 11,0 kW-N | 315 m³

CHARACTERISTICS



- Output smoke outlet possibilities: rear
- Shell and tube exchanger
- Combustion chamber probe
- Hearth, door fire and brazier in cast iron
- Emergency module
- Single door with double glass ceramic
- Extractable burn pot for easy cleaning
- Extractable ash drawer
- Removable handle with storage compartment

ECODESIGN



Download
Technical Sheet



SCAN ME

TECHNICAL DATA

Nominal power (min-max)

3,4 - 11,0 kW-N

Efficiency (min-max)

93,9 - 91,4 %

Hourly consumption (min-max)

0,8 - 2,5 kg/h

Dimensions (WxHxD)

480 x 1140 x 560 mm

Net weight

173 kg

Smoke outlet diameter (Ø)

80 mm B


Tank total capacity

~22 kg / ~35 l

Electric consumption (min-max)

25 - 45 W

TECHNOLOGY

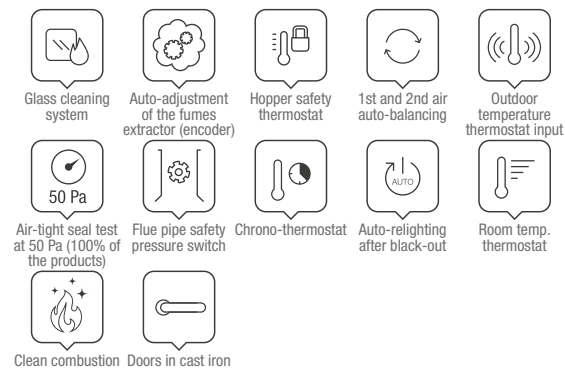

COLOUR CHOICES

Painted steel covered, top and bottom in majolica



White

Bright taupe

STANDARD EQUIPMENT



RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function

A⁺ | 12,0 kW-N | 344 m³

ECODESIGN

Download
technical data sheet



SCAN ME

CHARACTERISTICS



- Cast iron door, hearth and brazier
- Extractable ash drawer
- Combustion chamber probe
- FPC – An innovative adaptive system for regulating and maintaining air combustion constant over time
- Home automation integration with “Alexa” (Amazon).N.B. only with “Grey label” WiFi module – optional – and using the App Total Control 3.0. Service and “Alexa” device (Amazon) not included
- Easy Setup
- Easy Control



TECHNICAL DATA

Nominal power (min. - max.)

3,6 - 12,0 kW-N

Efficiency (min. - max.)

93,0 - 91,4 %

Hourly consumption (min. - max.)

0,8 - 2,7 kg/h

Dimensions (WxHxD)

576 x 1174 x 642 mm

Net weight

188 kg

Smoke outlet diameter (Ø)

80 mm B


Tank total capacity

~29 kg / ~46 l

Electric consumption (min. - max.)

45 - 58 W

TECHNOLOGY

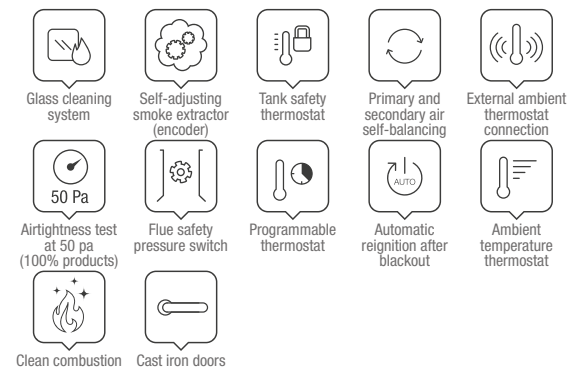

FINISHES

Painted steel cladding



White

Bronze

Matt Taupe

STANDARD EQUIPMENT



REMOTE CONTROL

Backlit IR Touch remote control



BLACK LCD

A⁺ | 12,0 kW-N | 344 m³

ECODESIGN

Download
technical data sheet



SCAN ME

CHARACTERISTICS



- Cast iron door, hearth and brazier
- Extractable ash drawer
- Combustion chamber probe
- FPC – An innovative adaptive system for regulating and maintaining air combustion constant over time
- Home automation integration with “Alexa” (Amazon).N.B. only with “Grey label” WiFi module – optional – and using the App Total Control 3.0. Service and “Alexa” device (Amazon) not included
- Easy Setup
- Easy Control



TECHNICAL DATA

Nominal power (min. - max.)

3,6 - 12,0 kW-N

Efficiency (min. - max.)

93,0 - 91,4 %

Hourly consumption (min. - max.)

0,8 - 2,7 kg/h

Dimensions (WxHxD)

576 x 1174 x 642 mm

Net weight

201 kg

Smoke outlet diameter (Ø)

80 mm B


Tank total capacity

~29 kg / ~46 l

Electric consumption (min. - max.)

45 - 58 W

TECHNOLOGY

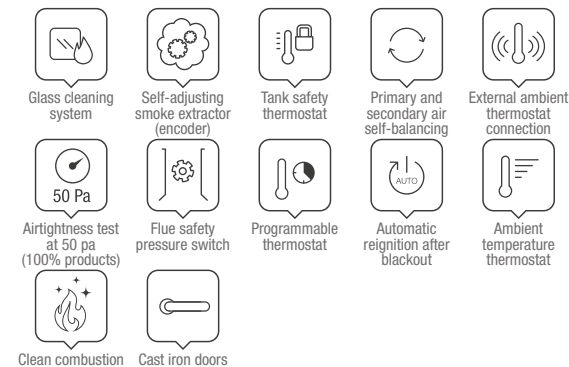

FINISHES

Majolica and painted steel cladding



White

Taupe

STANDARD EQUIPMENT



REMOTE CONTROL


Backlit IR Touch remote control



BLACK LCD

DUCTED PELLET STOVES

Evolution
line

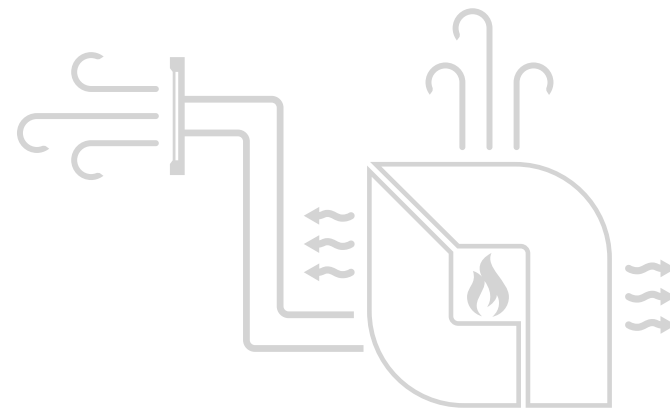

The product range with one
or more motors dedicated to
thermostable duct heating.

UP TO 8 METRES

PER DUCT



AIR-TIGHT STOVE

SAFE: Technology and innovation at the service of your safety.



HOME CONTROL SOLUTION

INNOVATIVE: Always in contact with your stove, even when you are away from home

ANNALISA PLUS



Airtight, double ducted pellet stove

Evolution
Life

New 2024

A+ | 12,0** kW-N | 344** m³


ECODESIGN**

Download
technical data sheet



SCAN ME

CHARACTERISTICS

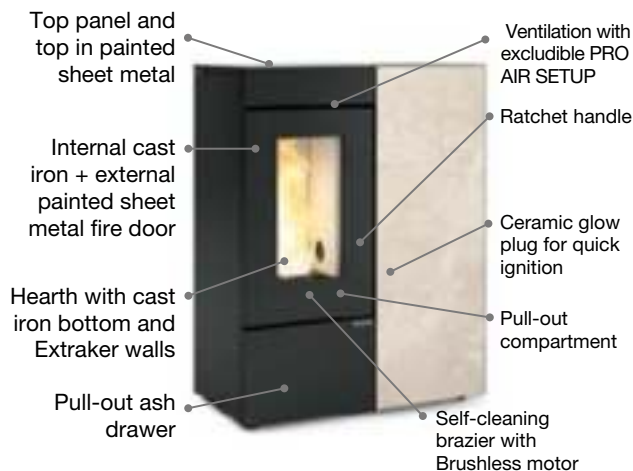

- Airtight stove
 - FPC Plus function
 - AIR ZONE CONTROL with excludable ducting
 - Automatic Mode
 - Wi-Fi as standard with 'Total Control 3.0' app
 - Easy Setup
 - Easy Control
 - Weekly chronothermostat
 - Combustion chamber probe
 - 2 dedicated ducting motors: max. length 8 metres, power output at least 1.3 kW each (with P5 power)
 - Top / rear / left side / right side ducting outlet.
- N.B. Possible to have a left and a right duct or other different 'mixed' solutions



UP TO 16 METRES (8m for 2 outputs) OF DUCTS



TECHNICAL DATA

Nominal power (min. - max.)

3,6 - 12,0 kW-N **

Efficiency (min. - max.)

> 88% **

Hourly consumption (min. - max.)

2,7 kg/h **

Dimensions (WxHxD)

900 x 1150 x 420 mm **

Net weight

** kg

Smoke outlet diameter (Ø)

80 mm B/T/RH side **

Tank total capacity

~24 kg / ~38 ℓ **

Electric consumption (min. - max.)

** W

TECHNOLOGY



Glass cleaning system



Self-adjusting smoke extractor (encoder)



External ambient thermostat connection



Airtightness test at 50 Pa (100% products)



Flue safety pressure switch



Programmable thermostat



Automatic reignition after blackout



Ambient temperature thermostat



Clean combustion



Cast iron doors

FINISHES

Painted steel cladding and Crystal or Stoneware front panel



Crystal



Gres Ostuni

STANDARD EQUIPMENT

RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function



CONSOLE WITH BUILT-IN WI-FI

("Total Control 3.0" app)



A+ | 12,0 kW-N | 344 m³

CHARACTERISTICS



- Cast iron door, hearth and brazier
- Extractable ash drawer
- Brushless gear motor for pellet loading
- Combustion chamber probe
- AIR ZONE CONTROL function for ducting
- FPC – An innovative adaptive system for regulating and maintaining air combustion constant over time
- Home automation integration with “Alexa” (Amazon).N.B. only with “Grey label” WiFi module – optional – and using the App Total Control 3.0. Service and “Alexa” device (Amazon) not included
- Easy Setup
- Easy Control



UP TO 16 METRES (8m for 2 outputs) OF DUCTS

ECODESIGN

Download
technical data sheet



SCAN ME



TECHNICAL DATA

Nominal power (min. - max.)

3,6 - 12,0 kW-N

Efficiency (min. - max.)

93,4 - 91,8 %

Hourly consumption (min. - max.)

0,8 - 2,7 kg/h

Dimensions (WxHxD)

576 x 1174 x 642 mm

Net weight

195 kg

Smoke outlet diameter (Ø)

80 mm B

Tank total capacity

~29 kg / ~46 l

Electric consumption (min. - max.)

60 - 105 W

TECHNOLOGY



FINISHES

Painted steel cladding



White

Bronze

Matt Taupe

STANDARD EQUIPMENT



REMOTE CONTROL

Backlit IR Touch remote control



BLACK LCD

NORIS PLUS LUX



Airtight, double ducted pellet stove

Evolution
line

A⁺ | 12,0 kW-N | 344 m³

CHARACTERISTICS

Double ducting
with two
dedicated
motors up
to 8 metres,
thermostatically
controlled and
removable
+ AIR ZONE
CONTROL



Ventilation
and ducting
with PRO AIR
SET UP, both
excludable

Self-cleaning
brazier with
Brushless motor

Ceramic glow
plug for quick
ignition

- Cast iron door, hearth and brazier
- Extractable ash drawer
- Brushless gear motor for pellet loading
- Combustion chamber probe
- AIR ZONE CONTROL function for ducting
- FPC – An innovative adaptive system for regulating and maintaining air combustion constant over time
- Home automation integration with “Alexa” (Amazon).N.B. only with “Grey label” WiFi module – optional – and using the App Total Control 3.0. Service and “Alexa” device (Amazon) not included
- Easy Setup
- Easy Control



UP TO 16 METRES (8m for 2 outputs) OF DUCTS

ECODESIGN

Download
technical data sheet



SCAN ME



TECHNICAL DATA

Nominal power (min. - max.)

3,6 - 12,0 kW-N

Efficiency (min. - max.)

93,4 - 91,8 %

Hourly consumption (min. - max.)

0,8 - 2,7 kg/h

Dimensions (WxHxD)

576 x 1174 x 642 mm

Net weight

208 kg

Smoke outlet diameter (Ø)

80 mm B

Tank total capacity

~29 kg / ~46 l

Electric consumption (min. - max.)

60 - 105 W

TECHNOLOGY



Glass cleaning
system



Self-adjusting
smoke extractor
(encoder)



Tank safety
thermostat



Primary and
secondary air
self-balancing



External ambient
thermostat
connection



Airtightness test
at 50 pa
(100% products)



Flue safety
pressure switch



Programmable
thermostat



Automatic
reignition after
blackout



Ambient
temperature
thermostat



Clean combustion



Cast iron doors

FINISHES

Majolica and painted steel cladding



White



Taupe

STANDARD EQUIPMENT



REMOTE CONTROL

Backlit IR Touch remote control



BLACK LCD

TERRY PLUS



Hermetic pellet stove with ducting system and two different outlets

Evolution
life

A⁺ | 12,1 kW-N | 347 m³

CHARACTERISTICS



- Output smoke outlet possibilities: rear
- Ducting system output possibilities (Ø80 mm): rear
- Front room ventilation with dedicated motor, with Comfort function
- Extractable hearth (only by authorized assistance)
- Hearth, door fire and brazier in cast iron
- Ergonomic handle
- Combustion chamber probe
- Shell and tube exchanger (manual cleaning)
- Emergency module
- Extractable ash drawer



UP TO 16 METRES (8m for 2 outputs) OF DUCTS with 3 independent ventilators that can be managed with 4 time ranges

ECODESIGN

Download
Technical Sheet



SCAN ME



TECHNICAL DATA

Nominal power (min-max)

3,5 - 12,1 kW-N

Efficiency (min-max)

92,0 - 94,0 %

Hourly consumption (min-max)

0,8 - 2,7 kg/h

Dimensions (WxHxD)

569 x 1151 x 598 mm

Net weight

206 kg

Smoke outlet diameter (Ø)

80 mm B

Tank total capacity

~29 kg / ~46 l

Electric consumption (min-max)

50 - 96 W

TECHNOLOGY



Glass cleaning system



Auto-adjustment of the fumes extractor (encoder)



Hopper safety thermostat



1st and 2nd air auto-balancing



Outdoor temperature thermostat input



Air-tight seal test at 50 Pa (100% of the products)



Flue pipe safety pressure switch



Chrono-thermostat



Auto-relighting after black-out



Room temp. thermostat



Clean combustion



Doors in cast iron

COLOUR CHOICES

External facing in majolica



Bordeaux



White



Bright taupe

STANDARD EQUIPMENT



RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function



AIR-TIGHT

SAFE: Air-tight combustion chamber and tank:
technology and innovation at the service of your safety



THE LATEST GENERATION IGNITION SYSTEM

FAST: For immediate warmth in your home, always and everywhere



EXCLUDABLE FORCED VENTILATION

SILENT: silence, without sacrificing efficiency



HOME CONTROL SOLUTION

INNOVATIVE: Always in contact with your stove, even when you
are away from home



SELF-CLEANING BRAZIER

CONVENIENT: your stove cleans itself


Freedom of choice
and cutting-edge
technology are merged in
Margaret, the combined
wood/pellet stove that
redefines the way of
heating:
customised combustion
and smart regulation
of each detail.



Evolution
line

H
Y
B
R
I
D
E

S
T
O
V
E
S

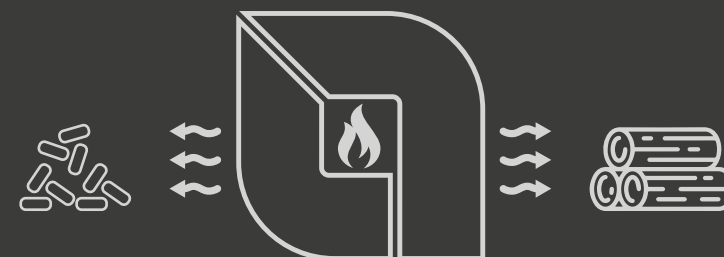



New 2024

A⁺ | **10,0** kW-N** | **287** m³**

CHARACTERISTICS



- Airtight stove
- FPC Plus function
- 'Total Control 3.0' app with Alexa and remote assistance functions
- Easy Setup
- Easy Control
- Weekly chronothermostat
- Primary/secondary air management via motor-controlled valve with automatic return (in the event of power failure)
- Brushless pellet loading motor
- Pellet level sensor
- Combustion chamber probe
- Ceramics glow plug
- Micro control on door
- Control pressure switches
- AIR ZONE CONTROL with excludable ducting (if optionally purchased)

ECODESIGN**

Download
Technical Sheet



SCAN ME



TECHNICAL DATA

Nominal power (min-max)

4,1 - 10,0 kW-N **

Efficiency (min-max)

> 88,0 % **

Hourly consumption (min-max)

0,9 - 2,4 kg/h ** (pellet)

2,4 kg/h ** (wood)

Dimensions (WxHxD)

890 x 1157 x 625 mm **

Net weight

** kg

Smoke outlet diameter (Ø)

120 mm B/T **

Tank total capacity

~30 kg / ~48 l**

Electric consumption (min-max)

** W

Wood length (max)

33 cm **

TECHNOLOGY



Glass cleaning system



Auto-adjustment of the fumes extractor (encoder)



1st and 2nd air auto-balancing



Outdoor temperature thermostat input



Air-tight seal test at 50 Pa (100% of the products)



Flue pipe safety pressure switch



Chrono-thermostat



Auto-relighting after black-out



Room temp. thermostat



Clean combustion



Doors in cast iron

COLOUR CHOICES

Painted steel and Stoneware or Natural Stone cladding



Gres Corten



Gres Ostuni



Natural stone (PT)

STANDARD EQUIPMENT



REMOTE CONTROL


Backlit IR touch remote control



DISPLAY BLACK MASK

Display Black Mask with integrated Wi-Fi (App "Total Control 3.0")

OPTIONAL



MARGARET DUCT KIT

** Technical data may be subject to changes, approval pending



THE LATEST GENERATION IGNITION SYSTEM

FAST: For immediate warmth in your home, always and everywhere



EXCLUDABLE FORCED VENTILATION

SILENT: silence, without sacrificing efficiency



PWM PUMP AUTOMATICALLY CONTROLLED BY THE ELECTRONIC BOARD

SIMPLE: Relax, the performance of your system is self-adjusting



NEW ELECTRONICS FOR CONNECTING TO THE SYSTEM EXPANSION CARD

FLEXIBLE: Maximum flexibility in the management of comfort in the rooms



HOME CONTROL SOLUTION

INNOVATIVE: Always in contact with your stove, even when you are away from home



SELF-CLEANING BRAZIER

CONVENIENT: your stove cleans itself



OPTIMISED COMBUSTION


EFFICIENT: Reduces the waiting time for relighting, ensuring optimal combustion

Silent and powerful,
they distribute the heat
rapidly and uniformly
throughout the home.



Evolution
line

P
E
L
L
E
T
H
E
A
T
I
N
G
S
T
O
V
E
S

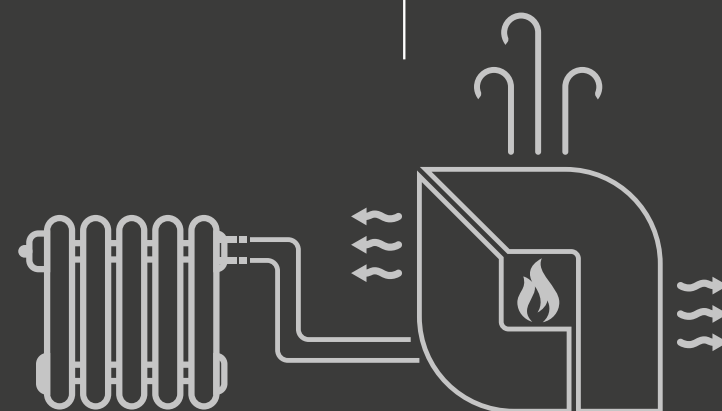

A⁺ | 16,2 kW-N | 14,0 kW-H₂O | 465 m³

ECODESIGN

Download
Technical Sheet



SCAN ME

CHARACTERISTICS



- Air relief valve
- Output smoke outlet possibilities: rear
- Wide fire vision
- Pressure transducer and display pressure value indication
- Combustion chamber in thick steel
- Ergonomic handle
- Door fire and brazier in cast iron
- Combustion chamber probe
- Shell and tube exchanger (manual cleaning)
- Thermal and pressure safety
- Expansion tank
- Safety valve 3 bar
- Extractable ash drawer



TECHNICAL DATA

Nominal power (min-max)
4,6 - 16,2 kW-N

Power given back to water (min-max)
3,6 - 14,0 kW-H₂O

Efficiency (min-max)
90,6 - 90,9 %

Hourly consumption (min-max)
1,1 - 3,7 kg/h

Dimensions (WxHxD)
576 x 1157 x 621 mm

Net weight
210 kg

Smoke outlet diameter (Ø)
100 mm B

Tank total capacity
~30 kg / ~48 l

Electric consumption (min-max)
20 - 40 W

Working pressure (bar)
3 bar

TECHNOLOGY



COLOUR CHOICES

High temperature painted steel covering



STANDARD EQUIPMENT



REMOTE CONTROL
Backlit IR touch remote control



BLACK LCD

EVELYNE IDRO 2.0






Airtight, ventilated, slim pellet thermo-stove

Evolution
life

A⁺ | 18,0 kW-N | 14,8 kW-H₂O | 517 m³

CHARACTERISTICS

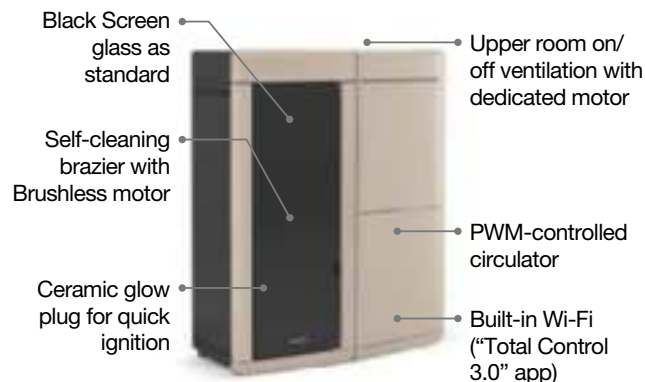

Rear hydraulic connections, accessible from the right side.

- Vent
- Smoke discharge outlet option: rear, upper, right-hand side
- Reduced depth
- Pressure transducer with display
- Thick steel combustion chamber
- Cast iron door and brazier
- Combustion chamber probe
- Double door: outer door with flat tempered glass
- Side shell and tube heat exchanger (manual cleaning)
- Emergency module
- Thermal and water pressure relief valves
- Expansion tank
- Safety valve 3 bar
- Extractable ash drawer

ECODESIGN

Download
technical data sheet



SCAN ME



TECHNICAL DATA

Nominal power (min. - max.)

5,3 - 18,0 kW-N

Water heating power (min. - max.)

3,5 - 14,8 kW-H₂O

Efficiency (min. - max.)

95,9 - 93,5 %

Hourly consumption (min. - max.)

1,1 - 4,0 kg/h

Dimensions (WxHxD)

878 x 1098 x 412 mm

Net weight

209 kg

Smoke outlet diameter (Ø)

100 mm B/T/RH side

Tank total capacity

~27 kg / ~43 l

Electric consumption (min. - max.)

80 - 85 W

Working pressure (bar)

3 bar

TECHNOLOGY



Glass cleaning system



Self-adjusting smoke extractor (encoder)



Tank safety thermostat



Primary and secondary air self-balancing



External ambient thermostat connection



Airtightness test at 50 pa (100% products)



Flue safety pressure switch



Programmable thermostat



Automatic reignition after blackout



Ambient temperature thermostat



Clean combustion



Cast iron doors

FINISHES

Majolica cladding



Grey



White



Taupe

STANDARD EQUIPMENT

RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function



CONSOLE WITH BUILT-IN WI-FI

("Total Control 3.0" app)



ISIDORA IDRO H16

Ventilated pellet thermo-stove

Evolution
life

A⁺ | 18,7 kW-N | 16,0 kW-H₂O | 536 m³


ECODESIGN

Download
Technical Sheet



SCAN ME

CHARACTERISTICS

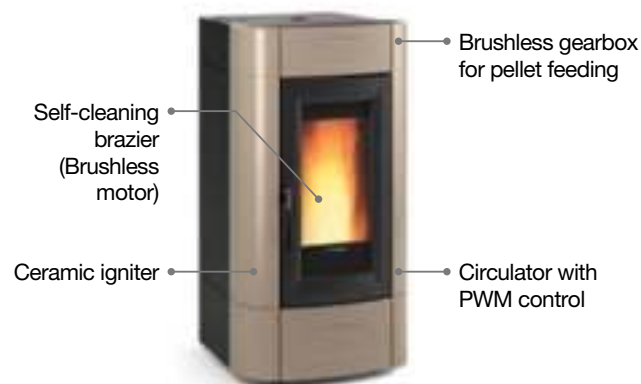

- Air relief valve
- Upper room ventilation with dedicated motor, excludable
- Output smoke outlet possibilities: rear aligned
- Pressure transducer and display pressure value indication
- Combustion chamber in thick steel
- Ergonomic handle
- Door fire and brazier in cast iron
- Hermetic tank
- Combustion chamber probe
- Shell and tube exchanger (manual cleaning)
- Thermal and pressure safety
- Wide fire vision
- Expansion tank
- Safety valve 3 bar
- Extractable ash drawer



TECHNICAL DATA

Nominal power (min-max)

5,6 - 18,7 kW-N

Power given back to water (min-max)

4,3 - 16,0 kW-H₂O

Efficiency (min-max)

91,5 - 92,4 %

Hourly consumption (min-max)

1,3 - 4,2 kg/h

Dimensions (WxHxD)

596 x 1165 x 708 mm

Net weight

227 kg

Smoke outlet diameter (Ø)

100 mm B

Tank total capacity

~33 kg / ~53 l

Electric consumption (min-max)

60 - 85 W

Working pressure (bar)

3 bar

TECHNOLOGY



Glass cleaning system



Auto-adjustment of the fumes extractor (encoder)



Hopper safety thermostat



1st and 2nd air auto-balancing



Outdoor temperature thermostat input



Air-tight seal test at 50 Pa (100% of the products)



Flue pipe safety pressure switch



Chrono-thermostat



Auto-relighting after black-out



Room temp. thermostat



Clean combustion



Doors in cast iron

COLOUR CHOICES

Finish in majolica and painted sheet metal



Bordeaux



White



Bright taupe

STANDARD EQUIPMENT



REMOTE CONTROL

Backlit IR touch remote control



DISPLAY BLACK MASK

Display Black Mask with integrated Wi-Fi (App "Total Control 2.0")

ISIDORA IDRO H2O

Ventilated pellet thermo-stove

Evolution
line

A++ | 23,2 kW-N | 20,0 kW-H₂O | 665 m³

ECODESIGN

Download
Technical Sheet



SCAN ME

CHARACTERISTICS



- Air relief valve
- Upper room ventilation with dedicated motor, excludable
- Output smoke outlet possibilities: rear aligned
- Pressure transducer and display pressure value indication
- Combustion chamber in thick steel
- Ergonomic handle
- Door fire and brazier in cast iron
- Hermetic tank
- Combustion chamber probe
- Shell and tube exchanger (manual cleaning)
- Thermal and pressure safety
- Wide fire vision
- Expansion tank
- Safety valve 3 bar
- Extractable ash drawer



TECHNICAL DATA

Nominal power (min-max)
6,9 - 23,2 kW-N

Power given back to water (min-max)
5,5 - 20,0 kW-H₂O

Efficiency (min-max)
91,2 - 91,5 %

Hourly consumption (min-max)
1,6 - 5,3 kg/h

Dimensions (WxHxD)
596 x 1243 x 708 mm

Net weight
235 kg

Smoke outlet diameter (Ø)
100 mm B

Tank total capacity
~38 kg / ~61 ℓ

Electric consumption (min-max)
65 - 85 W

Working pressure (bar)
3 bar

TECHNOLOGY



COLOUR CHOICES

Finish in majolica and painted sheet metal



Ivory

Bordeaux

STANDARD EQUIPMENT



REMOTE CONTROL

Backlit IR touch remote control



DISPLAY BLACK MASK

Display Black Mask with integrated Wi-Fi (App "Total Control 2.0")

ISIDORA IDRO H23 5.0

Ventilated pellet thermo-stove

Evolution
line

A⁺ | 27,6 kW-N | 23,0 kW-H₂O | 792 m³

ECODESIGN

Download
Technical Sheet



SCAN ME

CHARACTERISTICS



- Air relief valve
- Upper room ventilation with dedicated motor, excludable
- Output smoke outlet possibilities: rear aligned
- Combustion chamber in thick steel
- Fire door and brazier in cast iron
- Hermetic tank
- Combustion chamber probe
- Shell and tube exchanger (manual cleaning)
- Expansion tank
- Safety valve 3 bar
- Extractable ash drawer
- FPC – An innovative adaptive system for regulating and maintaining air combustion constant over time
- FPC PLUS – besides the work carried out by FPC, it allows abnormal situations to be noted by setting the generator in safe conditions.



TECHNICAL DATA

Nominal power (min-max)

7,7 - 27,6 kW-N

Power given back to water (min-max)

6,1 - 23,0 kW-H₂O

Efficiency (min-max)

89,3 - 92,1 %

Hourly consumption (min-max)

1,7 - 6,1 kg/h

Dimensions (WxHxD)

596 x 1243 x 737 mm

Net weight

235 kg

Smoke outlet diameter (Ø)

100 mm B

Tank total capacity

~38 kg / ~61 ℓ

Electric consumption (min-max)

30 - 38 W

Working pressure (bar)

3 bar

TECHNOLOGY



COLOUR CHOICES

Finish in majolica and painted sheet metal



White

Bordeaux

STANDARD EQUIPMENT



REMOTE CONTROL

Backlit IR touch remote control



DISPLAY BLACK MASK

Display Black Mask with integrated Wi-Fi (App "Total Control 3.0")

PELLET BOILERS

Evolution
line

Saving, comfort
and technology



>> **THE LATEST GENERATION IGNITION SYSTEM**
FAST: For immediate warmth in your home, always and everywhere

⚙ **PWM PUMP AUTOMATICALLY MANAGED BY THE ELECTRONIC CARD**
SIMPLE: Relax, the performance of your system is self-adjusting

≡ **NEW ELECTRONICS FOR CONNECTION TO THE PLANT'S EXPANSION CARD**
FLEXIBLE: Maximum flexibility in the management of comfort in the rooms

📱 **HOME CONTROL SOLUTION**
INNOVATIVE: Always in contact with your stove, even when you are away from home

🔔 **SELF-CLEANING BRAZIER**
CONVENIENT: your stove cleans itself

🔥 **OPTIMISED COMBUSTION**
EFFICIENT: Reduces the waiting time for relighting, ensuring optimal combustion


PR20

Pellet boiler with ash extractor

Evolution
line

A⁺ | 20,0 kW-N | 20,0 kW-H₂O | 573 m³

CHARACTERISTICS

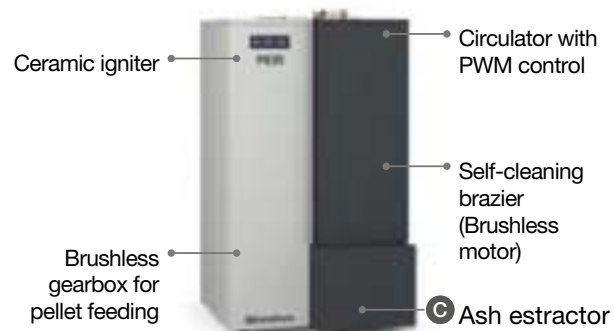

- A** Hydraulic connections at the top
- B** Output smoke outlet possibilities: rear, left lateral
 - Air relief valve
 - Minimum pellet tank level probe
 - Combustion chamber in thick steel
 - Combustion chamber probe
 - Door fire and brazier in cast iron
 - Thermal and pressure safety
 - Shell and tube exchanger (automatic cleaning)
 - Front pellet tank feeding
 - Expansion tank
 - Wheels to facilitate movement
 - Safety valve 3 bar
 - **Innovative adaptive system to adjust and even the combustion air inlet**

TECHNICAL DATA

Nominal power (min-max)
5,7 - 20,0 kW-N

Power given back to water (min-max)
5,7 - 20,0 kW-H₂O

Efficiency (min-max)
88,4 - 92,4 %

Hourly consumption (min-max)
1,4 - 4,6 kg/h

Dimensions (WxHxD)
822 x 1398 x 817 mm

Net weight
310 kg


Smoke outlet diameter (Ø)
100 mm B/LH side

Tank total capacity
~75 kg / ~119 ℓ

Electric consumption (min-max)
60 - 65 W

Working pressure (bar)
3 bar

TECHNOLOGY

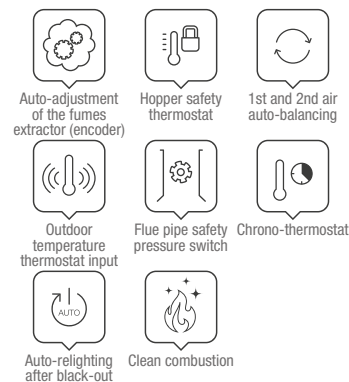

ECODESIGN



COLOUR CHOICES

High temperature painted steel covering



Light grey / Dark grey

STANDARD EQUIPMENT



DISPLAY BLACK MASK

Display Black Mask with integrated Wi-Fi (App "Total Control 2.0")



PLANT EXPANSION CARD KIT

OPTIONAL

Automatic loading pellet stocking tank
Automatic pellet loading kit 330 ℓ

Automatic pellet loading kit 660 ℓ

Extension module 180 ℓ (Available for: Automatic pellet loading kit 660 ℓ)

Extension module 270 ℓ (Available for: Automatic pellet loading kit 660 ℓ)

Download
Technical Sheet



SCAN ME


PR30

Pellet boiler with ash extractor

Evolution
line

A⁺ | 30,0 kW-N | 30,0 kW-H₂O | 860 m³

CHARACTERISTICS

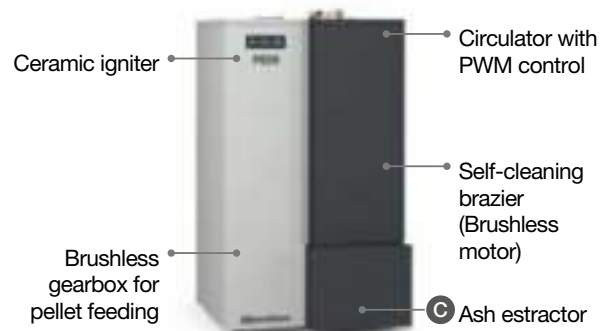

- A** Hydraulic connections at the top
- B** Output smoke outlet possibilities: rear, left lateral
 - Air relief valve
 - Minimum pellet tank level probe
 - Combustion chamber in thick steel
 - Combustion chamber probe
 - Door fire and brazier in cast iron
 - Thermal and pressure safety
 - Shell and tube exchanger (automatic cleaning)
 - Front pellet tank feeding
 - Expansion tank
 - Wheels to facilitate movement
 - Safety valve 3 bar
 - **Innovative adaptive system to adjust and even the combustion air inlet**

TECHNICAL DATA

Nominal power (min-max)
8,9 - 30,0 kW-N

Power given back to water (min-max)
8,9 - 30,0 kW-H₂O

Efficiency (min-max)
92,7 - 92,4 %

Hourly consumption (min-max)
2,0 - 6,8 kg/h

Dimensions (WxHxD)
892 x 1398 x 817 mm

Net weight
325 kg


Smoke outlet diameter (Ø)
120 mm B/LH side

Tank total capacity
~75 kg / ~119 ℓ

Electric consumption (min-max)
70 - 85 W

Working pressure (bar)
3 bar

TECHNOLOGY

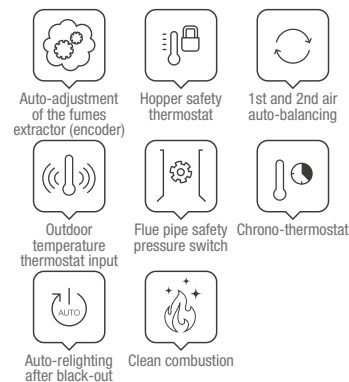

ECODESIGN



COLOUR CHOICES

High temperature painted steel covering



Light grey / Dark grey

Download
Technical Sheet



SCAN ME

STANDARD EQUIPMENT



DISPLAY BLACK MASK

Display Black Mask with integrated Wi-Fi (App "Total Control 2.0")



PLANT EXPANSION CARD KIT

OPTIONAL

Automatic loading pellet stocking tank
Automatic pellet loading kit 330 ℓ

Automatic pellet loading kit 660 ℓ

Extension module 180 ℓ (Available for: Automatic pellet loading kit 660 ℓ)

Extension module 270 ℓ (Available for: Automatic pellet loading kit 660 ℓ)

Discover the innovative solutions to manage the comfort of your home at best and in utter convenience thanks to your pellet product.

ACCESSORY



THE INSTALLATION EXPANSION BOARD

Optimises functioning of the appliance by means of appropriate configurations, reducing consumption and extending the working life of the product.

Thermal energy storage tanks

Wood or pellet boilers

Pellet stocking tank



**ALWAYS IN CONTACT
WITH YOUR STOVE**



Total Control 3.0

ACCESSORY APP

WIFI MODULE GREY LABEL

Compatible with models introduced from 2022



Total Control 2.0

ACCESSORY APP

WIFI MODULE BLACK LABEL

Compatible with models introduced from 2018



Total Control

ACCESSORY APP

WIFI MODULE WHITE LABEL

Compatible with models introduced up to 2017




Total Control 2.0

Display Balck Mask

Nuovo display Black Mask con Wi-Fi integrato per gestione da remoto con la nuova App dedicata "Total Control 2.0"



WOOD STOVES

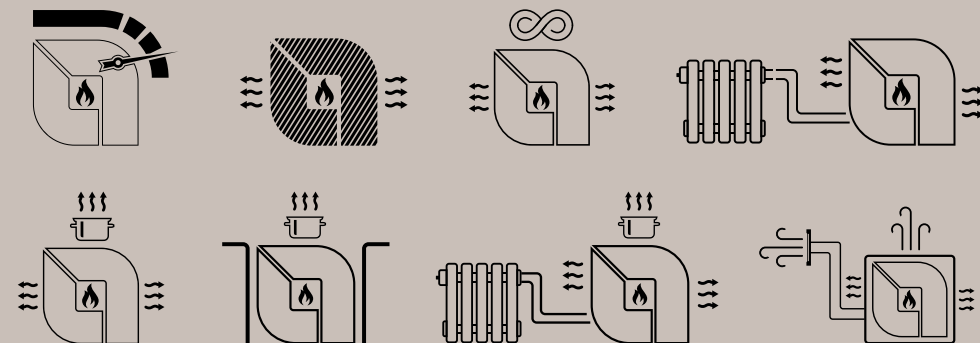

The quality and solidity of the materials,
the harmony of the lines,
the care in the realisation
and the safety in use.

With this in mind,
“La Nordica-Extraflame”
wood-burning products are born.

HIGH PERFORMANCE WOOD-BURNING STOVES



HIGH YIELDS AND LOW EMISSIONS
FOR AN UNMISTAKABLE STYLE



EMILIANA

A+



kW-N 6,5
% 88,7
m³ 186
kg/h 1,7
Dim. WxHxD 453x950x490
kg 140
Ø mm 120 T



White Infinity



EMILIANA - STEEL

A+



Anthracite Black

kW-N 6,5
% 88,7
m³ 186
kg/h 1,7
Dim. WxHxD 453x950x490
kg 121
Ø mm 120 T



FEDORA

A+



White Infinity

kW-N 8,3
% 86,4
m³ 238
kg/h 2,3
Dim. WxHxD 559x1035x547
kg 175
Ø mm 130 T



Bordeaux



HIGH PERFORMANCE WOOD-BURNING STOVES



FEDORA - STEEL

A+



Anthracite Black

| | |
|----------------|--------------|
| kW-N | 8,3 |
| % | 86,4 |
| m ³ | 238 |
| kg/h | 2,3 |
| Dim. WxHxD | 559x1035x547 |
| kg | 150 |
| Ø mm | 130 T |




CONCITA 2.0

A+



White Infinity

| | |
|----------------|--------------|
| kW-N | 11,8 |
| % | 86,4 |
| m ³ | 338 |
| kg/h | 3,2 |
| Dim. WxHxD | 559x1545x569 |
| kg | 185 |
| Ø mm | 150 T |

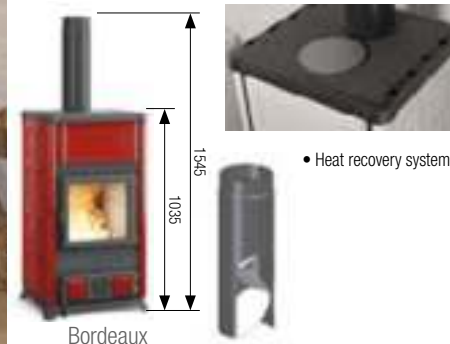

CONCITA 2.0 - STEEL

A+



Anthracite Black

| | |
|----------------|--------------|
| kW-N | 11,8 |
| % | 86,4 |
| m ³ | 338 |
| kg/h | 3,2 |
| Dim. WxHxD | 559x1545x569 |
| kg | 157 |
| Ø mm | 150 T |



CAST IRON WOOD-BURNING STOVES



HIGH PERFORMANCE FOR A TIMELESS STYLE



N.B. Enameled cast iron, when used correctly, has almost an unlimited life and requires minimal maintenance.

BRIGITTA GB

A⁺



| | |
|----------------------|-------------|
| kW-N | 4,7 |
| % | 81,0 |
| m³ | 134 |
| kg/h | 1,4 |
| Dim. WxHxD | 404x640x397 |
| kg | 70 |
| Ø mm | 120 T |



CANDY 4.0

A⁺



| | |
|----------------------|-------------|
| kW-N | 6,2 |
| % | 85,1 |
| m³ | 177 |
| kg/h | 1,7 |
| Dim. WxHxD | 404x890x397 |
| kg | 85 |
| Ø mm | 120 T |



GIULIETTA X 4.0

A⁺



| | |
|----------------------|-------------|
| kW-N | 6,5 |
| % | 81,7 |
| m³ | 186 |
| kg/h | 1,9 |
| Dim. WxHxD | 487x706x430 |
| kg | 115 |
| Ø mm | 120 B/T |



CAST IRON WOOD-BURNING STOVES



ISETTA CON CERCHI EVO 4.0

A+



| | |
|-------------------|-------------|
| kW-N | 7,3 |
| % | 83,6 |
| m³ | 209 |
| kg/h | 2,0 |
| Dim. WxHxD | 660x760x590 |
| kg | 167 |
| Ø mm | 150 B/T |



ISETTA EVO 4.0

A+



| | |
|-------------------|-------------|
| kW-N | 7,3 |
| % | 83,6 |
| m³ | 209 |
| kg/h | 2,0 |
| Dim. WxHxD | 660x706x590 |
| kg | 160 |
| Ø mm | 150 B/T |



MARLENA

A+



| | |
|-------------------|--------------|
| kW-N | 7,5 |
| % | 86,5 |
| m³ | 215 |
| kg/h | 2,0 |
| Dim. WxHxD | 465x1060x475 |
| kg | 140 |
| Ø mm | 130 T |

JENNIFER 2.0

A+



| | |
|-------------------|-------------|
| kW-N | 7,7 |
| % | 81,8 |
| m³ | 220 |
| kg/h | 2,2 |
| Dim. WxHxD | 702x870x478 |
| kg | 141 |
| Ø mm | 150 T |



CAST IRON WOOD-BURNING STOVES



ISOTTA FORNO EVO

A+



| | |
|----------------------|--------------|
| kW-N | 9,7 |
| % | 87,7 |
| m³ | 278 |
| kg/h | 2,6 |
| Dim. WxHxD | 795x1244x530 |
| kg | 300 |
| Ø mm | 150 T |
| Oven capacity | 39 l |



ISOTTA CON CERCHIEVO

A+



| | |
|----------------------|-------------|
| kW-N | 11,9 |
| % | 82,0 |
| m³ | 338 |
| kg/h | 3,2 |
| Dim. WxHxD | 790x830x660 |
| kg | 216 |
| Ø mm | 150 B/T |




ISOTTA EVO

A+




| | |
|----------------------|-------------|
| kW-N | 11,9 |
| % | 82,0 |
| m³ | 338 |
| kg/h | 3,2 |
| Dim. WxHxD | 790x775x660 |
| kg | 205 |
| Ø mm | 150 B/T |

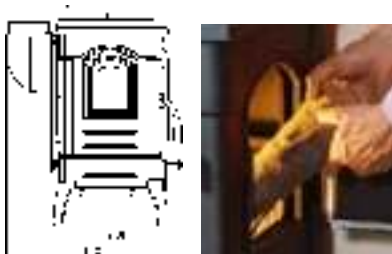

EVERGREEN WOOD-BURNING STOVE



50 YEARS OF HISTORY, AN UNMISTAKEABLE STYLE

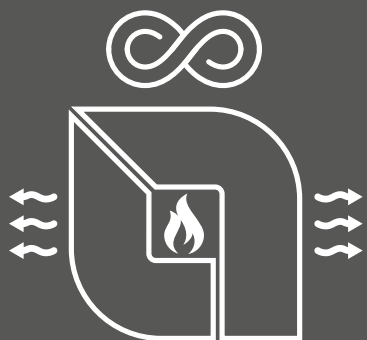

SUPER JUNIOR

A



Black

| | |
|-------------------|-------------|
| kW-N | 5,0 |
| % | 80,0 |
| m³ | 143 |
| kg/h | 1,5 |
| Dim. WxHxD | 360x771x419 |
| kg | 64 |
| Ø mm | 120 mm T |



Green



TEA

A+



White

| | |
|-------------------|-------------|
| kW-N | 6,6 |
| % | 82,0 |
| m³ | 189 |
| kg/h | 1,8 |
| Dim. WxHxD | 414x832x419 |
| kg | 77 |
| Ø mm | 120 T |



Anthracite Black



ASIA BII

A+



Vulcan

| | |
|-------------------|-------------|
| kW-N | 6,0 |
| % | 81,3 % |
| m³ | 172 |
| kg/h | 1,7 |
| Dim. WxHxD | 438x930x470 |
| kg | 159 |
| Ø mm | 120 T |



EVERGREEN WOOD-BURNING STOVE



GEMMA

A⁺



kW-N 6,0
% 82,2
m³ 172
kg/h 1,7
Dim. WxHxD 460x840x495
kg 85 - PT 98
Ø mm 120 T



GEMMA FORNO 5.0

A⁺



kW-N 7,3
% 87,2
m³ 209
kg/h 1,9
Dim. WxHxD 460x1207x495
kg 125 - PT 140
Ø mm 120 T
Oven capacity 19 l



ESTER BII

A



kW-N 7,5
% 80,0
m³ 215
kg/h 2,2
Dim. WxHxD 540x950x478
kg 243
Ø mm 130 T



ESTER FORNO EVO

A⁺



kW-N 8,2
% 86,7
m³ 235
kg/h 2,2
Dim. WxHxD 540x1300x478
kg 317
Ø mm 130
Oven capacity 22 l



EVERGREEN WOOD-BURNING STOVE



ROSSELLA R1 BII

A



| | |
|-------------------|--------------|
| kW-N | 8,8 |
| % | 80,0 |
| m³ | 252 |
| kg/h | 2,4 |
| Dim. WxHxD | 578x915x586 |
| kg | 155 - 170 PT |
| Ø mm | 130 T |



Liberty
Bordeaux

Liberty
White Infinity

Liberty
Panna

ROSSELLA PLUS FORNO EVO

A+



| | |
|----------------------|--------------|
| kW-N | 9,1 |
| % | 86,0 |
| m³ | 260 |
| kg/h | 2,4 |
| Dim. WxHxD | 559x1359x536 |
| kg | 195 - 219 PT |
| Ø mm | 130 T |
| Oven capacity | 37 ℓ |




Liberty Bordeaux


Natural Stone (PT)



WOOD-BURNING HEATING STOVES



IT'S TIME TO THINK ABOUT YOUR HEATING PLANT

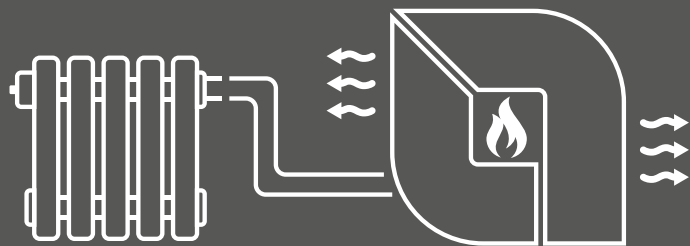

TERMOROSSELLA PLUS EVO DSA 4.0

A⁺



Liberty Panna

| | |
|--------------------------|--------------|
| kW-N | 11,1 |
| kW-H₂O | 8,0 |
| % | 88,0 |
| m³ | 318 |
| kg/h | 3,0 |
| Dim. WxHxD | 559x915x533 |
| kg | 162 - 175 PT |
| Ø mm | 130 T |



Liberty Bordeaux



Natural Stone (PT)

TERMOROSSELLA PLUS FORNO DSA 4.0

A⁺



Liberty Bordeaux

| | |
|--------------------------|--------------|
| kW-N | 11,1 |
| kW-H₂O | 8,0 |
| % | 88,0 |
| m³ | 318 |
| kg/h | 3,0 |
| Dim. WxHxD | 559x1359x533 |
| kg | 218 - 242 PT |
| Ø mm | 130 T |
| Oven capacity | 37 ℓ |



Liberty Panna



Natural Stone (PT)

TERMOISOTTA DSA


★★★★ A



| | |
|--------------------------|-------------|
| kW-N | 15,0 |
| kW-H₂O | 8,5 |
| % | 78,4 |
| m³ | 430 |
| kg/h | 4,4 |
| Dim. WxHxD | 760x775x520 |
| kg | 212 |
| Ø mm | 150 T |



WOOD-BURNING HEATING STOVES



LORIET S DSA

A+



Bordeaux

| | |
|--------------------------|--------------|
| kW-N | 16,8 |
| kW-H₂O | 10,5 |
| % | 88,0 |
| m³ | 481 |
| kg/h | 4,3 |
| Dim. WxHxD | 570x1258x567 |
| kg | 203 |
| Ø mm | 130 T |



White Infinity

NORMA S IDRO DSA

A



Bordeaux


| | |
|--------------------------|--------------|
| kW-N | 19,5 |
| kW-H₂O | 14,9 |
| % | 78,6 |
| m³ | 559 |
| kg/h | 5,8 |
| Dim. WxHxD | 720x1242x575 |
| kg | 249 |
| Ø mm | 160 T |




Agate Grey



EVERGREEN WOOD-BURNING COOKER



FOOD COOKED IN A WOOD-BURNING STOVE
JUST TASTES BETTER

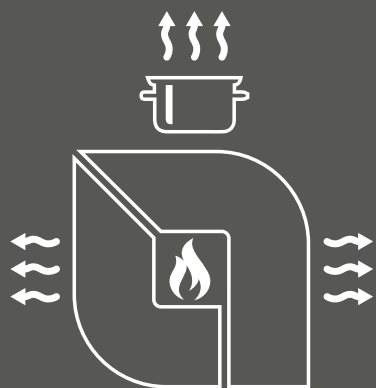

FAMILY 4,5

A+



Anthracite Black

| | |
|----------------|-------------|
| kW-N | 7,5 |
| % | 81,0 |
| m ³ | 215 |
| kg/h | 2,2 |
| Dim. WxHxD | 964x853x642 |
| kg | 125 |
| Ø mm | 130 T |
| Oven capacity | 41 ℓ |



White

Cappuccino

SOVRANA EASYEVO 2.0

A+



Anthracite Black

| | |
|----------------|-------------|
| kW-N | 7,5 |
| % | 81,0 |
| m ³ | 215 |
| kg/h | 2,2 |
| Dim. WxHxD | 964x848x641 |
| kg | 140 |
| Ø mm | 130 B/T |
| Oven capacity | 41 ℓ |



White

Cappuccino

ROSETTA 5.0 - CERAMICA

A+



Liberty Panna

| | |
|----------------|-------------|
| kW-N | 7,9 |
| % | 86,9 |
| m ³ | 226 |
| kg/h | 2,1 |
| Dim. WxHxD | 885x843x572 |
| kg | 153 |
| Ø mm | 130 B/T |
| Oven capacity | 28 ℓ |



Liberty Bordeaux

EVERGREEN WOOD-BURNING COOKER



ROSETTA 5.0 - PETRA

A+



| | |
|----------------------|-------------|
| kW-N | 7,9 |
| % | 86,9 |
| m³ | 226 |
| kg/h | 2,1 |
| Dim. WxHxD | 885x843x572 |
| kg | 167 |
| Ø mm | 130 B/T |
| Oven capacity | 28 ℓ |

ROSETTA 5.0 - MAIOLICA

A+



| | |
|----------------------|-------------|
| kW-N | 7,9 |
| % | 86,9 |
| m³ | 226 |
| kg/h | 2,1 |
| Dim. WxHxD | 885x843x572 |
| kg | 169 |
| Ø mm | 130 B/T |
| Oven capacity | 28 ℓ |



Bordeaux

ROSETTA SINISTRA 5.0

A+



| | |
|----------------------|-------------|
| kW-N | 7,9 |
| % | 86,9 |
| m³ | 226 |
| kg/h | 2,1 |
| Dim. WxHxD | 885x843x572 |
| kg | 153 |
| Ø mm | 130 B/T |
| Oven capacity | 28 ℓ |



Liberty Panna

ROSETTA SINISTRA 5.0 - PETRA


A+



| | |
|----------------------|-------------|
| kW-N | 7,9 |
| % | 86,9 |
| m³ | 226 |
| kg/h | 2,1 |
| Dim. WxHxD | 885x843x572 |
| kg | 167 |
| Ø mm | 130 B/T |
| Oven capacity | 28 ℓ |

Natural Stone

EVERGREEN WOOD-BURNING COOKER



ROSETTA SINISTRA 5.0 - STEEL

A+



Anthracite Black

| | |
|----------------------|-------------|
| kW-N | 7,9 |
| % | 86,9 |
| m³ | 226 |
| kg/h | 2,1 |
| Dim. WxHxD | 885x843x572 |
| kg | 139 |
| Ø mm | 130 B/T |
| Oven capacity | 28 ℓ |



Dotted White

ROSA REVERSE 2.0

A+



Liberty Bordeaux

| | |
|----------------------|--------------|
| kW-N | 8,2 |
| % | 86,5 |
| m³ | 235 |
| kg/h | 2,3 |
| Dim. WxHxD | 1030x851x650 |
| kg | 183 |
| Ø mm | 150 B/T |
| Oven capacity | 28 ℓ |



Liberty Panna

ROSA SINISTRA REVERSE

A+



Liberty Panna

| | |
|----------------------|--------------|
| kW-N | 8,2 |
| % | 86,5 |
| m³ | 235 |
| kg/h | 2,3 |
| Dim. WxHxD | 1030x851x650 |
| kg | 183 - 200 PT |
| Ø mm | 150 B/T |
| Oven capacity | 28 ℓ |



Liberty Bordeaux



Natural Stone (PT)

ROSA 5.0 - CERAMICA

A+



Liberty Panna

| | |
|----------------------|--------------|
| kW-N | 8,8 |
| % | 85,4 |
| m³ | 252 |
| kg/h | 2,5 |
| Dim. WxHxD | 1030x851x650 |
| kg | 183 |
| Ø mm | 150 B/T |
| Oven capacity | 41 ℓ |



Liberty Bordeaux

EVERGREEN WOOD-BURNING COOKER



ROSA 5.0 - MAIOLICA

A+



Bordeaux

kW-N 8,8
% 85,4
m³ 252
kg/h 2,5
Dim. WxHxD 1030x851x650
kg 204
Ø mm 150 B/T
Oven capacity 41 ℓ



White Infinity

Taupe

ROSA 5.0 - PETRA

A+



Natural Stone

kW-N 8,8
% 85,4
m³ 252
kg/h 2,5
Dim. WxHxD 1030x851x650
kg 200 PT
Ø mm 150 B/T
Oven capacity 41 ℓ

ROSA 5.0 - STEEL

A+



Anthracite Black

kW-N 8,8
% 85,4
m³ 252
kg/h 2,5
Dim. WxHxD 1030x851x650
kg 170
Ø mm 150 B/T
Oven capacity 41 ℓ



Dotted White

SUPREMA 4.0


A+



Glazed Black

kW-N 9,0
% 87,7
m³ 258
kg/h 2,4
Dim. WxHxD 974x860x660
kg 220
Ø mm 150 B/T
Oven capacity 78 ℓ

EVERGREEN WOOD-BURNING COOKER



ROSA L 5.0 - STEEL

A+



Anthracite Black

| | |
|----------------------|-------------|
| kW-N | 9,5 |
| % | 86,7 |
| m³ | 272 |
| kg/h | 2,5 |
| Dim. WxHxD | 975x861x670 |
| kg | 192 |
| Ø mm | 150 B/T |
| Oven capacity | 55 ℓ |

ROSA XXL 5.0 - STEEL

A+



Anthracite Black

| | |
|----------------------|--------------|
| kW-N | 11,0 |
| % | 87,3 |
| m³ | 315 |
| kg/h | 2,9 |
| Dim. WxHxD | 1074x861x669 |
| kg | 202 |
| Ø mm | 150 B/T |
| Oven capacity | 78 ℓ |

ROSA XXL 5.0 - MAIOLICA

A+



White Infinity

| | |
|----------------------|--------------|
| kW-N | 11,0 |
| % | 87,3 |
| m³ | 315 |
| kg/h | 2,9 |
| Dim. WxHxD | 1074x861x669 |
| kg | 235 |
| Ø mm | 150 B/T |
| Oven capacity | 78 ℓ |



Bordeaux

ROSA XXL 5.0 - PETRA

A+



Natural Stone

| | |
|----------------------|--------------|
| kW-N | 11,0 |
| % | 87,3 |
| m³ | 315 |
| kg/h | 2,9 |
| Dim. WxHxD | 1074x861x669 |
| kg | 275 |
| Ø mm | 150 B/T |
| Oven capacity | 78 ℓ |

WOOD-BURNING COOKERS FOR INSERTION



THE PERFECT COMBINATION FOR YOUR KITCHEN



VICENZA EVO

A⁺



Inox

| | |
|----------------------|----------------------------|
| kW-N | 6,0 |
| % | 86,0 |
| m³ | 172 |
| kg/h | 1,7 |
| Dim. WxHxD | 600x850-910x600 |
| kg | 137 |
| Ø mm | 120 mm T/B/RH Side/LH Side |
| Oven capacity | 25 ℓ |
| W | 25 W |



Anthracite Black

VERONA XXL

A⁺



Anthracite Black

| | |
|----------------------|----------------------------|
| kW-N | 7,0 |
| % | 85,1 |
| m³ | 200 |
| kg/h | 1,9 |
| Dim. WxHxD | 800x850-910x600 |
| kg | 175 |
| Ø mm | 150 mm T/B/RH Side/LH Side |
| Oven capacity | 68 ℓ |
| W | 25 W |



Inox

VERONA XXL - MAIOLICA (FREE-STANDING)

A⁺



White Infinity

| | |
|----------------------|-------------|
| kW-N | 7,0 |
| % | 85,1 |
| m³ | 200 |
| kg/h | 1,9 |
| Dim. WxHxD | 800x910x600 |
| kg | 200 |
| Ø mm | 150 mm B/T |
| Oven capacity | 68 ℓ |
| W | 25 W |



Bordeaux

WOOD-BURNING COOKERS FOR INSERTION



VERONA XXL - PETRA (FREE-STANDING)

A+



Natural Stone

| | |
|----------------------|-------------|
| kW-N | 7,0 |
| % | 85,1 |
| m³ | 200 |
| kg/h | 1,9 |
| Dim. WxHxD | 800x910x600 |
| kg | 206 |
| Ø mm | 150 mm B/T |
| Oven capacity | 68 ℓ |
| W | 25 W |

VENEZIA

A+




Inox

| | |
|----------------------|-----------------|
| kW-N | 8,3 |
| % | 86,9 |
| m³ | 238 |
| kg/h | 2,2 |
| Dim. WxHxD | 900x850-910x600 |
| kg | 175 |
| Ø mm | 130 B/T/RH Side |
| Oven capacity | 44 ℓ |
| W | 25 W |




Anthracite Black

WOOD-BURNING THERMO-COOKERS



HEAT, TASTE AND ATMOSPHERE:
ALL OF THIS IN ONE PRODUCT

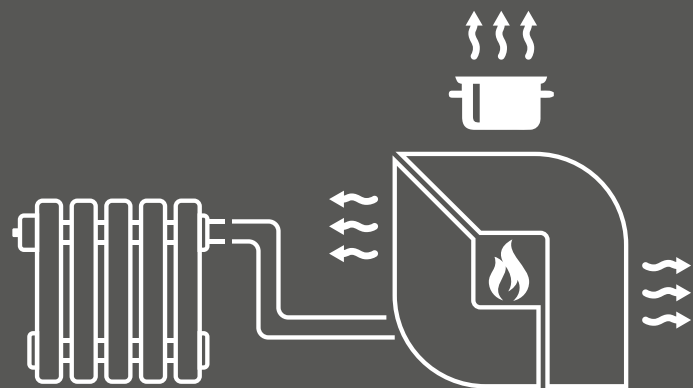

TERMOSOVRAANA DSA

A⁺



Anthracite Black

| | |
|--------------------------|-------------|
| kW-N | 13,5 |
| kW-H₂O | 9,0 |
| % | 81,2 |
| m³ | 387 |
| kg/h | 3,9 |
| Dim. WxHxD | 964x889x640 |
| kg | 166 |
| Ø mm | 130 B/T |
| Oven capacity | 41 ℓ |



White

TERMOROSA DSA

A



Liberty Bordeaux

| | |
|--------------------------|-----------------|
| kW-N | 15,5 |
| kW-H₂O | 9,0 |
| % | 79,9 |
| m³ | 444 |
| kg/h | 4,5 |
| Dim. WxHxD | 1017x852x662 |
| kg | 211 - 226 PT kg |
| Ø mm | 150 B/T |
| Oven capacity | 41 ℓ |



Natural Stone (PT)

TERMOROSA XXL DSA


A⁺




Anthracite Black

| | |
|--------------------------|--------------|
| kW-N | 18,4 |
| kW-H₂O | 15,1 |
| % | 83 |
| m³ | 527 |
| kg/h | 5,2 |
| Dim. WxHxD | 1074x861x690 |
| kg | 275 kg |
| Ø mm | 160 B/T |
| Oven capacity | 55 ℓ |

CAST IRON / CRYSTAL / WIDE INSERTS FOR WOOD-BURNING



THE IDEAL SOLUTION FOR YOUR FIREPLACE

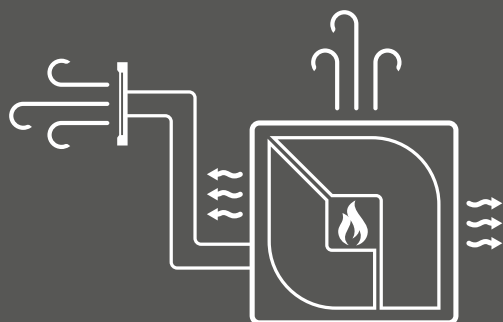


N.B.: Two adequately sized ventilation grilles (an inlet grille at the bottom and an outlet one at the top) should be installed during assembly to ensure correct operation and permit heating of the room and correct cooling of the product (see the manual attached to the product).

INSERTO 60 4.0 - VENTILATO

A+



| | |
|----------------|-------------|
| kW-N | 6,5 |
| % | 80,8 |
| m ³ | 186 |
| kg/h | 1,9 |
| Dim. WxHxD | 595x500x440 |
| kg | 124 |
| Ø mm | 160 T |
| W | 23 |

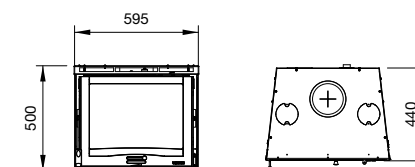


INSERTO 70 H49 4.0 - VENTILATO

A+



| | |
|----------------|-------------|
| kW-N | 6,7 |
| % | 82,0 |
| m ³ | 192 |
| kg/h | 1,9 |
| Dim. WxHxD | 695x495x450 |
| kg | 149 |
| Ø mm | 160 T |
| W | 34 |

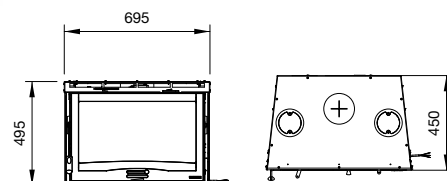


INSERTO 70 L 4.0 - VENTILATO


A



| | |
|----------------|-------------|
| kW-N | 7,8 |
| % | 79,1 |
| m ³ | 223 |
| kg/h | 2,3 |
| Dim. WxHxD | 695x550x450 |
| kg | 128 |
| Ø mm | 160 T |
| W | 34 |



CAST IRON / CRYSTAL / WIDE INSERTS FOR WOOD-BURNING




INSERTO 70 4.0 - VENTILATO

A



| | |
|------------|-------------|
| kW-N | 7,8 |
| % | 79,1 |
| m³ | 223 |
| kg/h | 2,3 |
| Dim. WxHxD | 695x550x450 |
| kg | 142 |
| Ø mm | 160 T |
| W | 34 |




INSERTO 80 CRYSTAL EVO 2.0 - VENTILATO

A+



| | |
|------------|-------------|
| kW-N | 7,4 |
| % | 83,9 |
| m³ | 212 |
| kg/h | 2,1 |
| Dim. WxHxD | 800x555x500 |
| kg | 130 |
| Ø mm | 160 T |
| W | 40 |

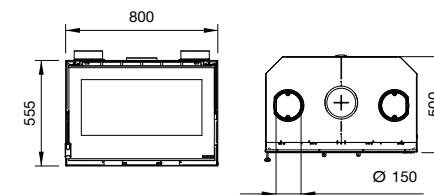


INSERTO 80 HIGH PRESSURE

A+



| | |
|------------|-------------|
| kW-N | 7,9 |
| % | 82,4 |
| m³ | 226 |
| kg/h | 2,3 |
| Dim. WxHxD | 800x555x520 |
| kg | 128 |
| Ø mm | 160 T |
| W | 50 |

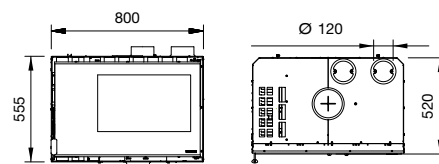


INSERTO 80 PRS CRYSTAL - VENTILATO


A+



| | |
|------------|-------------|
| kW-N | 8,3 |
| % | 87,4 |
| m³ | 237 |
| kg/h | 2,2 |
| Dim. WxHxD | 800x916x500 |
| kg | 150 |
| Ø mm | 160 T |
| W | 40 |

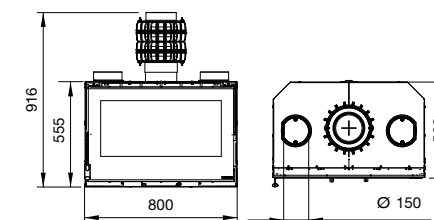

CAST IRON / CRYSTAL / WIDE INSERTS FOR WOOD-BURNING




INSERTO 70 WIDE

A+



| | |
|------------|-------------|
| kW-N | 7,5 |
| % | 80,7 |
| m³ | 215 |
| kg/h | 2,2 |
| Dim. WxHxD | 704x561x506 |
| kg | 140 |
| Ø mm | 160 T |

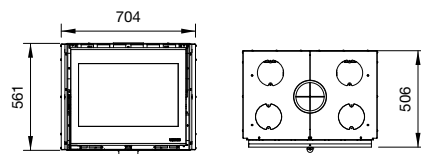


INSERTO 70 PRS WIDE

A+



| | |
|------------|--------------|
| kW-N | 8,1 |
| % | 86,1 |
| m³ | 232 |
| kg/h | 2,2 |
| Dim. WxHxD | 704x1051x506 |
| kg | 158 |
| Ø mm | 160 T |

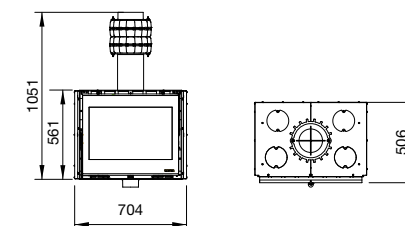


INSERTO 80 WIDE 2.0

A+



| | |
|------------|-------------|
| kW-N | 8,0 |
| % | 82,1 |
| m³ | 229 |
| kg/h | 2,3 |
| Dim. WxHxD | 800x561x509 |
| kg | 150 |
| Ø mm | 160 T |

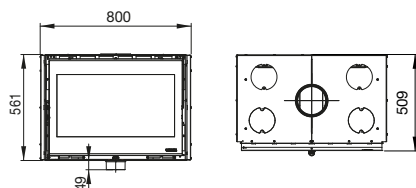


INSERTO 100 WIDE


A+




| | |
|------------|--------------|
| kW-N | 8,1 |
| % | 81,0 |
| m³ | 232 |
| kg/h | 2,3 |
| Dim. WxHxD | 1000x561x509 |
| kg | 178 |
| Ø mm | 160 T |



MONOBLOCKS



THE IDEAL SOLUTION FOR YOUR FIREPLACE


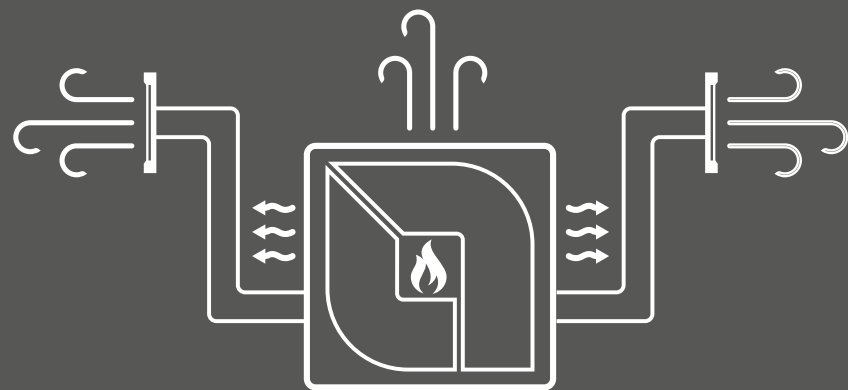


MONOBLOCCO 800 ANGOLO DX

A⁺



| | |
|----------------------|-------------------|
| kW-N | 10,0 |
| % | 80,9 |
| m³ | 287 |
| kg/h | 2,9 |
| Dim. WxHxD | 879x1570-1605x612 |
| kg | 271 |
| Ø mm | 200 T |





MONOBLOCCO 800 ANGOLO SX


A⁺




| | |
|----------------------|-------------------|
| kW-N | 10,0 |
| % | 80,9 |
| m³ | 287 |
| kg/h | 2,9 |
| Dim. WxHxD | 879x1570-1605x612 |
| kg | 271 |
| Ø mm | 200 T |



WOOD-BURNING CLOSED FIREPLACES



THE IDEAL SOLUTION FOR YOUR FIREPLACE

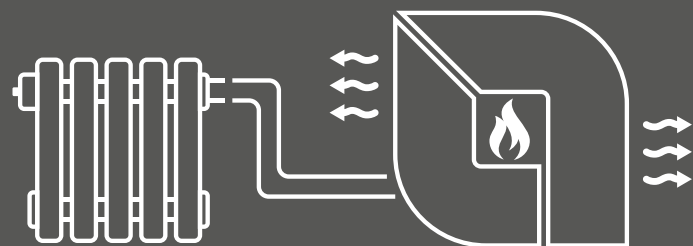


TERMOCAMINO WF PLUS DSA

A+



| | |
|---------------------|-------------------|
| kW-N | 20,5 |
| kW-H ₂ O | 11,3 |
| % | 85,5 |
| m ³ | 587 |
| kg/h | 5,4 |
| Dim. WxHxD | 846x1585-1625x667 |
| kg | 334 |
| Ø mm | 200 T |

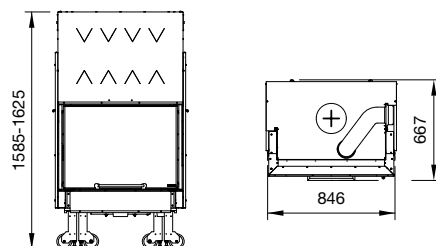

WOOD

PRESTIGE

Line

PERFECT SYMBIOSIS

OF DESIGN

AND WARMTH

A⁺ | 7,5 kW-N | 215 m³

CHARACTERISTICS



TECHNICAL DATA

Nominal power

7,5 kW-N

Efficiency

86,5 %

Hourly consumption

2,0 kg/h

Dimensions (WxHxD)

528x1127x490 mm

Net weight

170 kg

Smoke outlet diameter (Ø)

130 mm T

Hearth opening size (WxH)

270 x 375 mm

Hearth size (WxHxD)

295 x 420 x 310 mm

Wood length (max)

30 cm

TECHNOLOGY



Hearth in Nordiker®



Post combustion



Doors in cast iron



Glass cleaning system



Direct outdoor air intake (BBC)

ECODESIGN

Download
Technical Sheet



SCAN ME



COLOUR CHOICES

External facing in majolica



Bordeaux



White Infinity



Internal facing of the hearth in cast iron and Nordiker

LIÙ - PIETRA

Wood burning stove

PRESTIGE

Line

A⁺ | 7,5 kW-N | 215 m³

CHARACTERISTICS



TECHNICAL DATA

Nominal power
7,5 kW-N

Efficiency
86,5 %

Hourly consumption
2,0 kg/h

Dimensions (WxHxD)
528 X 1107 X 508 mm

Net weight
201 kg

Smoke outlet diameter (Ø)
130 mm T

Hearth opening size (WxH)
270 x 375 mm

Hearth size (WxHxD)
295 x 429 x 310 mm

Wood length (max)
30 cm

TECHNOLOGY



ECODESIGN

Download
Technical Sheet



SCAN ME



COLOUR CHOICES

Finish in natural stone carved from a single block



Natural stone



Internal facing of the hearth in cast iron and Nordiker

TAHITI

Cast iron wood burning stove

PRESTIGE

Line

A⁺ | 7,7 kW-N | 220 m³

CHARACTERISTICS



TECHNICAL DATA

Nominal power
7,7 kW-N

Efficiency
81,8 %

Hourly consumption
2,2 kg/h

Dimensions (WxHxD)
746 x 894 x 483 mm

Net weight
150 kg

Smoke outlet diameter (Ø)
150 mm T

Hearth opening size (WxH)
532 x 212 mm

Hearth size (WxHxD)
585 x 290 x 255 mm

Wood length (max)
50 cm

TECHNOLOGY



ECODESIGN

Download
Technical Sheet



SCAN ME



COLOUR CHOICES

Finish entirely in enamelled cast iron



Anthracite black



Front and side loading door

N.B. Enameled cast iron, when used correctly, has almost an unlimited life and requires minimal maintenance.

TAHITI EPS


Wood stove with heat recovery system

PRESTIGE

Line

A⁺ | 8,0 kW-N | 229 m³

CHARACTERISTICS

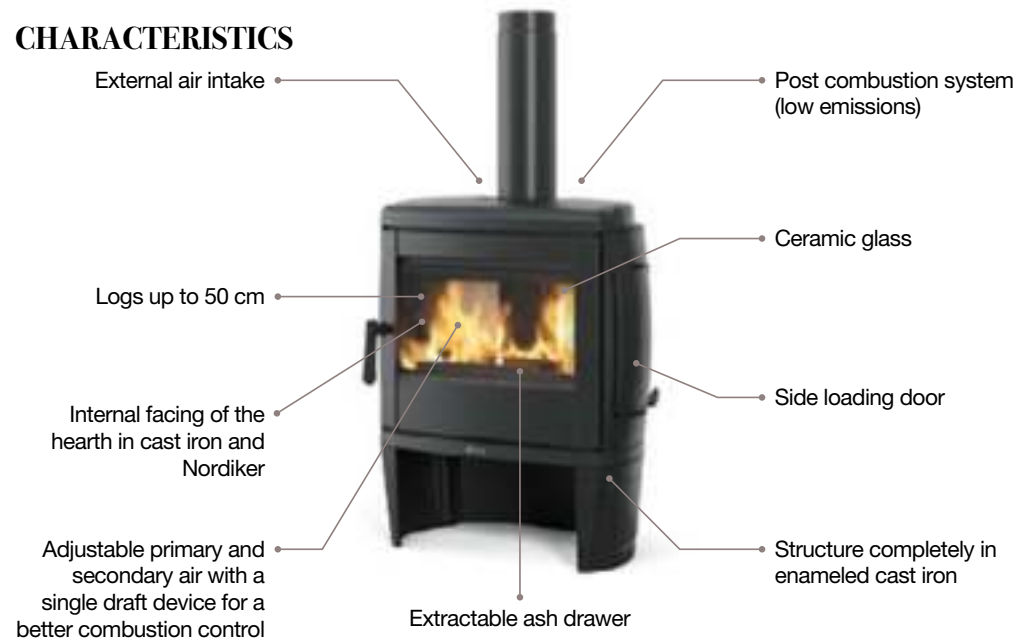

TECHNICAL DATA

Nominal power
8,0 kW-N

Efficiency
87,6 %

Hourly consumption
2,2 kg/h

Dimensions (WxHxD)
746 x 1373 x 483 mm

Net weight
154 kg

Smoke outlet diameter (Ø)
150 mm T

Hearth opening size (WxH)
532 x 212 mm

Hearth size (WxHxD)
585 x 290 x 255 mm

Wood length (max)
50 cm

TECHNOLOGY



ECODESIGN

Download
Technical Sheet



SCAN ME




COLOUR CHOICES

Finish entirely in enamelled cast iron



Anthracite black



STANDARD EQUIPMENT - TAHITI EPS




EPS System
Model with heat recovery system



Front and side loading door

A⁺ | 8,8 kW-N | 252 m³

CHARACTERISTICS

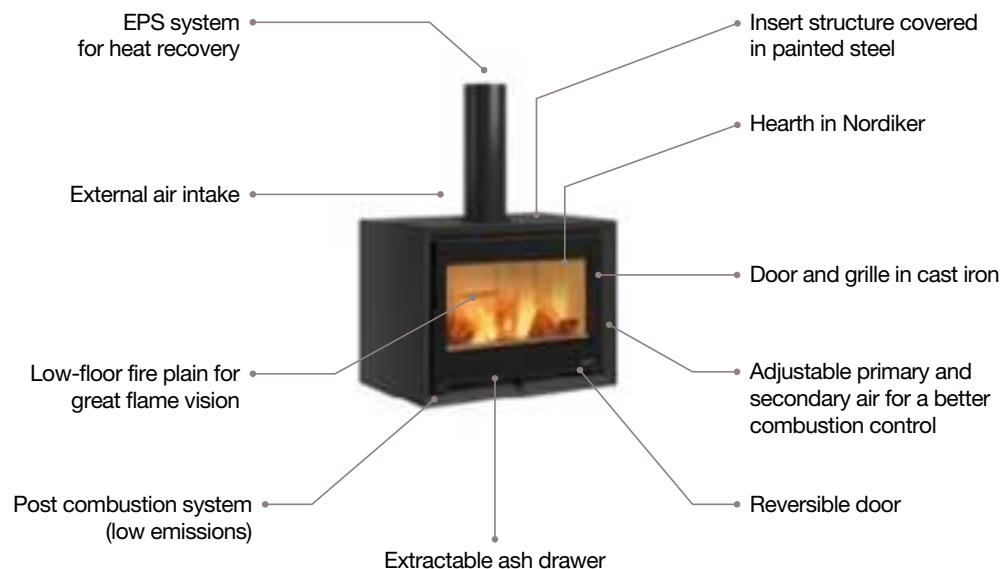

TECHNICAL DATA

Nominal power
8,8 kW-N

Efficiency
85,5 %

Hourly consumption
2,4 kg/h

Dimensions (WxHxD)
822 x 1055 x 550 mm

Net weight
158 kg

Smoke outlet diameter (Ø)
160 mm T

Hearth opening size (WxH)
626 x 278 mm

Hearth size (WxHxD)
652 x 295 x 350 mm

Wood length (max)
30 cm

TECHNOLOGY



ECODESIGN



Download
Technical Sheet



SCAN ME

COLOUR CHOICES

High temperature painted steel covering - Matte black

DANTE WITH BENCH (optional element)
Examples of combinations



Dimensions with bench (LxHxD)

1490 x 1525 x 540 mm

STANDARD EQUIPMENT



EPS System
Model with heat recovery system

OPTIONAL



Bench Matte black
LxHxD 1490x470x540 mm
53,5 Kg

DANTE CON PORTALEGNA

Wood stove with heat recovery system

PRESTIGE

Line

A⁺ | 8,8 kW-N | 252 m³

ECODESIGN

Download
Technical Sheet



SCAN ME

CHARACTERISTICS



TECHNICAL DATA

Nominal power
8,8 kW-N

Efficiency
85,5 %

Hourly consumption
2,4 kg/h

Dimensions (WxHxD)
822 x 1480 x 553 mm

Net weight
183 kg

Smoke outlet diameter (Ø)
160 mm T

Hearth opening size (WxH)
626 x 278 mm

Hearth size (WxHxD)
652 x 295 x 350 mm

Wood length (max)
30 cm

TECHNOLOGY



COLOUR CHOICES


High temperature painted steel covering - Matte black



STANDARD EQUIPMENT



EPS System
Model with heat recovery system



NOVA FORNO

Wood stove with oven

PRESTIGE

Line

A⁺ | **11,8 kW-N** | **338 m³**

ECODESIGN

Download
technical data sheet



SCAN ME

CHARACTERISTICS



TECHNICAL DATA

Nominal power
11,8 kW-N

Efficiency
86,4 %

Hourly consumption
3,2 kg/h

Dimensions (WxHxD)
559 x 1496 x 569 mm

Net weight
256 kg

Smoke outlet diameter (Ø)
150 mm T

Hearth opening size (WxH)
315 x 285 mm

Hearth size (WxHxD)
357 x 450 x 362 mm

Oven size (WxHxD)
330 x 300 x 370 mm

Wood length (max)
30 cm

TECHNOLOGY



Nordiker® hearth



Post combustion



Cast iron doors



Glass cleaning system



Outdoor air intake (ASC)

FINISHES

Majolica cladding



Matt white



Bordeaux

STANDARD EQUIPMENT



ENAMELLED OVEN PAN (1 piece)



CHROME PLATED OVEN GRILL (1 piece)



N.B. When used correctly, enamelled cast iron has an almost unlimited lifespan and requires minimal maintenance.

NOVA FORNO - STEEL

Wood stove with oven


PRESTIGE

Line

A⁺ | **11,8 kW-N** | **338 m³**


ECODESIGN

Download
technical data sheet



SCAN ME

CHARACTERISTICS

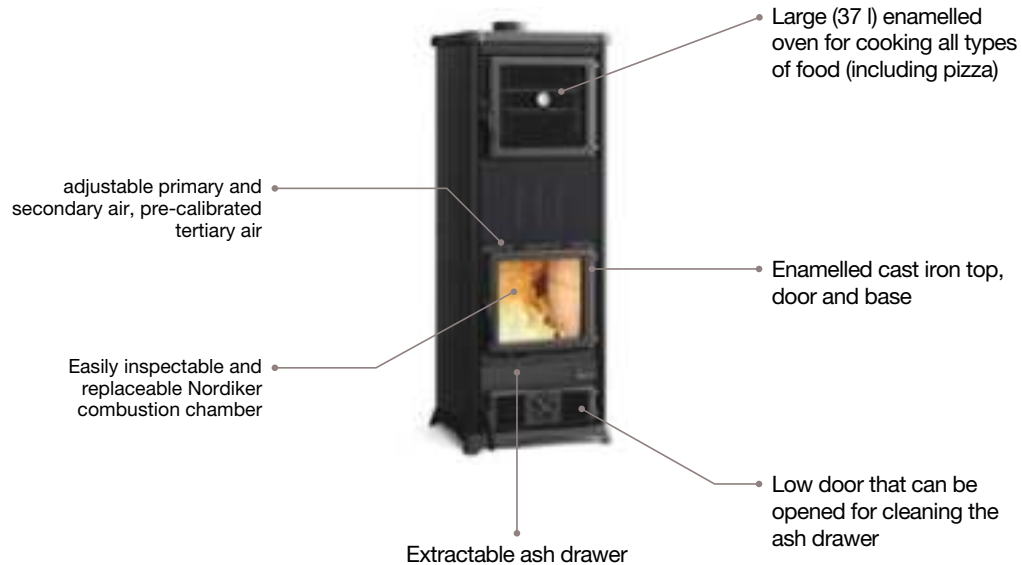

TECHNICAL DATA

Nominal power
11,8 kW-N

Efficiency
86,4 %

Hourly consumption
3,2 kg/h

Dimensions (WxHxD)
559 x 1496 x 569 mm

Net weight
217 kg

Smoke outlet diameter (Ø)
150 mm T

Hearth opening size (WxH)
315 x 285 mm

Hearth size (WxHxD)
357 x 450 x 362 mm

Oven size (WxHxD)
330 x 300 x 370 mm

Wood length (max)
30 cm

TECHNOLOGY



Nordiker® hearth



Post combustion



Cast iron doors



Glass cleaning system



Outdoor air intake (ASC)

FINISHES

Enamelled external steel



Anthracite black

STANDARD EQUIPMENT



ENAMELLED OVEN PAN (1 piece)



CHROME PLATED OVEN GRILL (1 piece)

A⁺ | 8,7 kW-N | 249 m³

ECODESIGN

Download
Technical Sheet



SCAN ME

CHARACTERISTICS



TECHNICAL DATA

Nominal power
8,7 kW-N

Efficiency
89,1 %

Hourly consumption
2,3 kg/h

Dimensions (WxHxD)
1050 x 865 x 670 mm
(without food warmer)

Net weight
217 kg
(without food warmer)

Smoke outlet diameter (Ø)
150 mm B/T

Hearth opening size (WxH)
240 x 185 mm

Hearth size (WxHxD)
270 x 287 x 455 mm

Oven size (WxHxD)
436 x 418 x 430 mm

Wood length (max)
30 cm

TECHNOLOGY



COLOUR CHOICES

Finish in enamelled steel and majolica



Bordeaux

White Infinity

STANDARD EQUIPMENT



ENAMELLED BACKING TRAY (1 piece)



OVEN GRID (1 piece)

OPTIONAL



FOOD WARMER

Bordeaux - White Infinity
Dimensions (WxHxD) 987x710x370mm
Attention: pipe not included

GARDENIA 5.0

Wood-burning cooker

PRESTIGE
Line

New 2024

A⁺ | 9,5 kW-N | 272 m³

CHARACTERISTICS



TECHNICAL DATA

Nominal power
9,5 kW-N

Efficiency
86,7 %

Hourly consumption
2,5 kg/h

Dimensions (WxHxD)
950 x 864 x 704 mm

Net weight
192 kg - 212 Kg PT

Smoke outlet diameter (Ø)
150 mm B/T


Hearth opening size (WxH)
225 x 210 mm

Hearth size (WxHxD)
296 x 306 x 460 mm

Oven size (WxHxD)
307 x 418 x 430 mm


Wood length (max)
30 cm

TECHNOLOGY



ECODESIGN**

Download
Technical Sheet



SCAN ME



COLOUR CHOICES

Cast iron and enamelled steel cladding



Anthracite black

Natural stone

STANDARD EQUIPMENT



ENAMELLED OVEN PAN (1 piece)

CHROME PLATED OVEN GRILL (1 piece)

ALASKA

Wood-burning cooker

PRESTIGE

Line

A⁺ | 12,0 kW-N | 344 m³

ECODESIGN

Download
technical data sheet



SCAN ME

CHARACTERISTICS



TECHNICAL DATA

Nominal power
12,0 kW-N

Efficiency
88,6 %

Hourly consumption
3,2 kg/h

Dimensions (WxHxD)
1307 x 860 x 705 mm

Net weight
350 kg

Smoke outlet diameter (Ø)
150 mm B/T

Hearth opening size (WxH)
405 x 278 mm

Hearth size (WxHxD)
400 x 340 x 460 mm

Oven size (WxHxD)
434 x 418 x 430 mm

Wood length (max)
30 cm

TECHNOLOGY



Nordiker®



Post combustion



Cast iron doors



Glass cleaning system




Direct external air inlet (BBC)

FINISHES

Cast iron and enamelled steel cladding



Glazed black



Three-ring plate

STANDARD EQUIPMENT



ENAMELLED OVEN PAN (1 piece)



STAINLESS STEEL GRILL (1 piece)



CHROME PLATED OVEN GRILL (1 piece)

OPTIONAL



CHROME PLATED HANDRAIL AND TERMINALS

N.B. When used correctly, enamelled cast iron has an almost unlimited lifespan and requires minimal maintenance.

New 2024

A+ | 16,0** kW-N | 9,0** kW-H₂O | 430** m³


ECODESIGN**

Download
technical data sheet



SCAN ME

CHARACTERISTICS

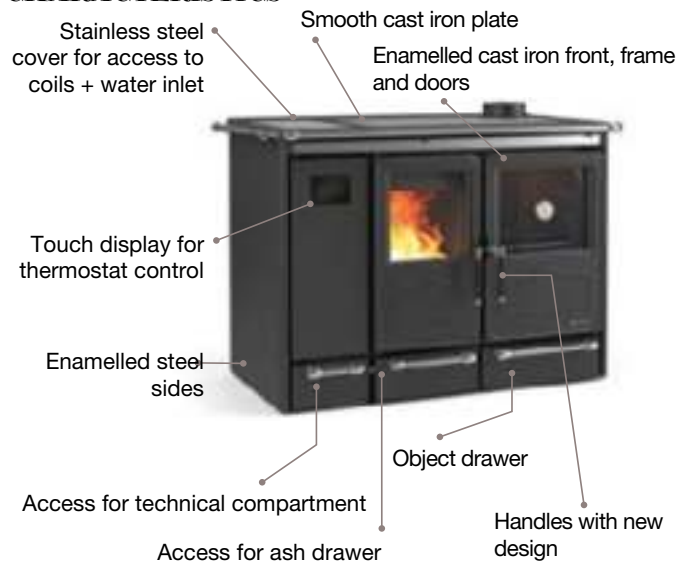

STANDARD HYDRAULIC EQUIPMENT


- Heating circuit coil
- DHW circuit coil
- Control unit:
 - Frost protection function
 - Pump anti-seize function
- Low consumption electronic circulator for primary circuit
- Non-return valve
- Automatic venting all-purpose equipment
- DHW flow switch
- Level switch
- Sacrificial magnesium anode
- Primary circuit temperature sensor
- Fill/drain tap



TECHNICAL DATA

| | |
|-------------------------------------------------------------|-----------------------------------------------------------|
| Nominal power 16,0 kW-N ** | Smoke outlet diameter (Ø) 150 mm B/T/RH Side ** |
| Power given back to water 9,0 H ₂ O ** | Hearth opening size (WxH) ** x ** mm |
| Efficiency > 85,0 % ** | Hearth size (WxHxD) ** x ** x ** mm |
| Hourly consumption 4,1 kg/h ** | Oven size (WxHxD) ** x ** x ** mm |
| Dimensions (WxHxD) 1251 x 861 x 725 mm | Wood length (max) ** cm |
| Net weight ** kg | Working pressure (bar) ** bar |

TECHNOLOGY




COLOUR CHOICES

Cast iron and enamelled steel cladding



Anthracite black

STANDARD EQUIPMENT

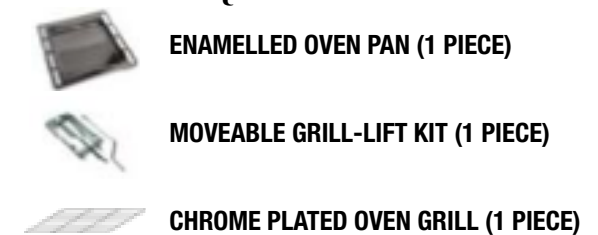


MONOBLOCCO 3LC

Wood-burning monoblock for fireplaces



A+ | 12 kW-N | 344 m³

CHARACTERISTICS

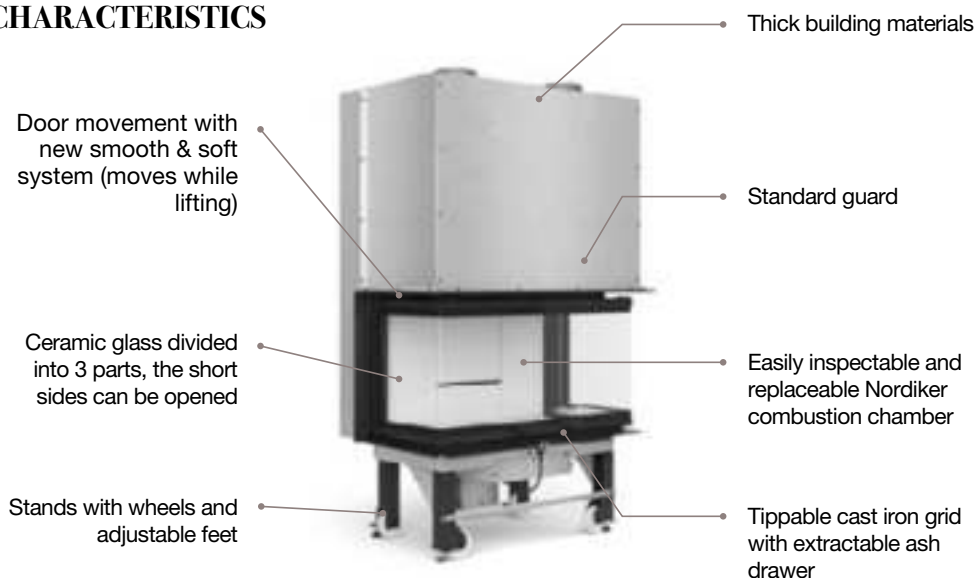

TECHNICAL DATA

Nominal power
12,0 kW-N

Efficiency
82,0 %

Hourly consumption
3,5 kg/h

Dimensions (WxHxD)
1034 x 1642-1685 x 655 mm

Net weight
320 kg


Smoke outlet diameter (Ø)
200 mm

Hearth opening size (WxH)
830 x 350 mm

Hearth size (WxHxD)
690 x 480 x 320 mm

Wood length (max)
50 cm

TECHNOLOGY



ECODESIGN

Download
technical data sheet

SCAN ME



FINISHES



OPTIONAL



"Wind Air" Kit



Shade diffuser



Wave diffuser


MONOBLOCCO 90PA 2.0

Wood-burning monoblock for fireplaces



A+ | 13,2 kW-N | 378 m³

CHARACTERISTICS

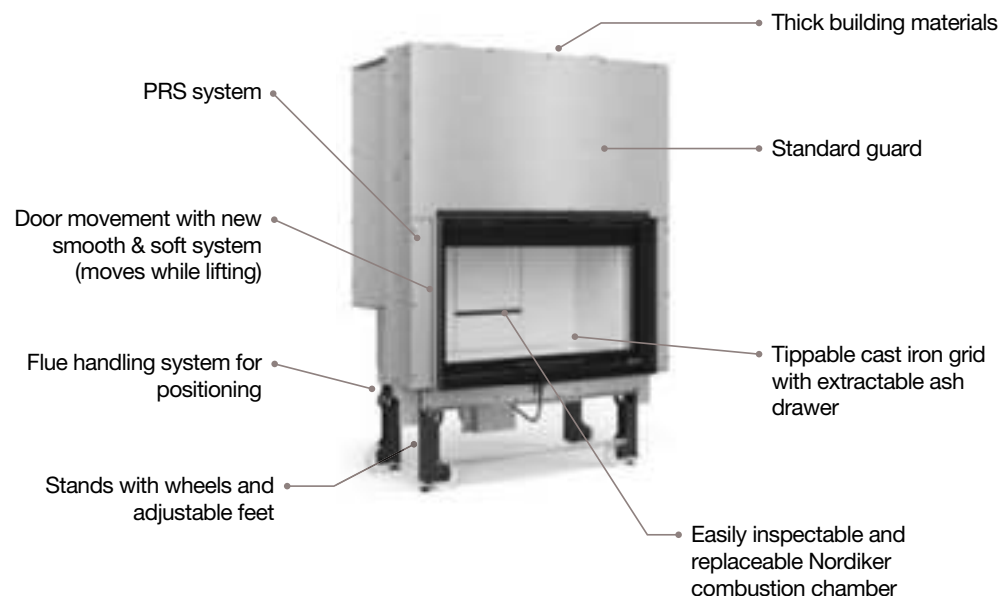

TECHNICAL DATA

Nominal power
13,2 kW-N

Efficiency
85,3 %

Hourly consumption
3,7 kg/h

Dimensions (WxHxD)
1105 x 1590-1630 x 650 mm

Net weight
320 kg


Smoke outlet diameter (Ø)
180 mm

Hearth opening size (WxH)
830 x 350 mm

Hearth size (WxHxD)
815 x 480 x 325 mm

Wood length (max)
50 cm

TECHNOLOGY



ECODESIGN

Download
technical data sheet


SCAN ME



FINISHES



OPTIONAL



Stainless steel frame kit



"Wind Air" Kit



Shade diffuser



Wave diffuser

Evolution
line

THE TOP-OF-THE-LINE PRODUCTION
OF THE LA NORDICA-EXTRAFLAME GROUP
FOR THE BEST RETAILERS.
DESIGN, TECHNOLOGY
AND PERFORMANCE.



LARISSA

Wood-burning stove with automatic combustion air control

Evolution
life

New 2024

A⁺ | 8,0** kW-N | 230** m³

CHARACTERISTICS



SIMPLICITY AND SAVINGS

The electronic system regulates the input of combustion air to optimise the various working phases of the stove:

- **Ignition** = Helps speed flame ignition by adding more primary air
- **Combustion** = Allows combustion air to be balanced while optimising efficiency: thus less consumption and emissions
- **Eco mode** = Reduces the combustion air registers in a calculated manner to maintain the heat of the embers as long as possible; this also facilitates the lighting of new wood logs in the event of recharging

LARISSA: an easy-to-use wood stove that also saves on consumption.

ECODESIGN**

Download
technical data sheet



SCAN ME



TECHNICAL DATA

Nominal power
8,0 kW-N **

Efficiency
> 85,0 % **

Hourly consumption
kg/h **

Dimensions (WxHxD)
628 x 1226 x 527 mm **

Net weight
kg **


Smoke outlet diameter (Ø)
130 mm B/T**

Hearth opening size (WxH)
** x ** mm **

Hearth size (WxHxD)
** x ** x ** mm **

Wood length (max)
** cm **

TECHNOLOGY

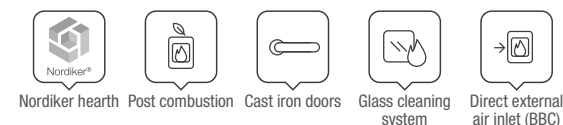

COLOUR CHOICES

Enamelled cast iron cladding and painted steel sides



Anthracite black



STANDARD EQUIPMENT

TOUCH BUTTON WITH LED
(management + product status info)

INTEGRATED NAVEI WI-FI MODULE
(App 'Total Control 3.0')

OPTIONAL

REMOTE CONTROL
Control with radio-controlled "hand-held" device, with thermostat function


PELLET

WOOD-BURNING



Glass cleaning system

A system of pre-heated air which removes any deposit from the fire-door glass.



Extractable burn pot for easy cleaning

The burn pot's system of construction allows easy extraction for quick and complete cleaning.



Auto-adjustment of the fumes extractor (encoder)

It keeps the RPM of the fumes motor constant, to ensure correct combustion of the product.



Hearth in Nordiker

La Nordica-Extrafame uses a special material called Nordiker for the production of hearth walls refractories.




Post combustion

The combustion system developed by La Nordica-Extrafame allows, due to a secondary/tertiary air system, a post combustion which significantly reduces emissions.



Hopper safety thermostat

Ensure always high safety standard, preventing the overheating of the product in case of anomaly.




1st and 2nd air auto-balancing

Primary and secondary air electronically balanced for an optimal combustion and thermal efficiency.



Outdoor temperature thermostat input

The product interfaces with room temperature control devices (thermostat or contacts) to achieve the selected temperature in every room.



Doors in cast iron

The high-quality cast-iron doors are made to last and ensure perfect sealing at all times.




Automatic safety device

It is a safety device created to quickly reduce water temperature, according to rules in force. DSA valve not included.



Air-tight seal test at 50 Pa (100% of the products)

All the air-tight products, or even those that have some "air-tight" components (like the hopper), are tested under high pressure at the end of the production line to ensure their safety and optimal performance.



Flue pipe safety pressure switch

Checks the correct evacuation of the fumes and, in case of need, locks the loading of pellets, to avoid problems on the generator.



Chrono-thermostat

Chronothermostat provided with temperature control divided in four daily slots for an optimal rooms management.



Glass cleaning system

A system of pre-heated air which removes any deposit from the fire-door glass.



Direct outdoor air intake (BBC)

Air intake system which draws fresh air from outside directly into the adjust system combustion regulation of the firebox of the appliance.



Auto-relighting after black-out

Following a black out the appliance automatically re-starts after having carried out the scheduled auto-control.



Room temp. thermostat

The room probe optimizes comfort and lowers noticeably the consumption.



Clean combustion

Increases the combustion efficiency and the duration of parts subject to wear duration reducing at the same time the ordinary brazier cleaning.



Outdoor air intake (ASC)

A particular connection system which allows to introduce air from the outside into the pre-heated environment around the fire-box.



Radiant system (PRS)

High efficiency Heat exchanger system

LIST OF FUNCTIONS OF PELLET PRODUCTS

EASY SETUP

The *Easy Setup* function allows the user to easily configure the stove so that it can operate as efficiently as possible with most types of pellets available on the market. It ensures optimum performance in terms of yield for each type of pellet.

EASY CONTROL

In order to function, a stove must be connected to a system that has a flue and an external air inlet. Not all systems are the same as they depend on the physical characteristics of the building in which they are used: consequently, the operating conditions of the stove can vary considerably depending on the system itself. Thanks to the Easy Control function, the stove operates under optimal conditions even in difficult situations, minimising unwanted effects such as condensation and poor combustion, and it can also help to keep the glass of the stove door cleaner.

FLOW PERFORMANCE CONTROL (FPC)

The FPC system keeps the supply of combustion air constant at all times, thus ensuring that combustion characteristics remain the same. In this way, maximum stove efficiency is achieved even when the system conditions (stove+flue pipe) change.

AUTOMATIC

The stove accurately and continuously regulates the power output in order to reach and maintain the temperature set by the user. This translates into improved thermal and acoustic comfort and reduced consumption.

AIR ZONE CONTROL (AZC)

The Air Zone Control feature is exclusive to products with a dedicated motor for ducting. The AZC function ensures maximum heat output to the ducting when the room in which the stove is installed has reached the set temperature. Therefore, in this mode, maximum comfort is achieved in the ducted area and consumption is significantly reduced when the set temperature is reached in the main room.

PRO AIR SETUP

New setup for ventilation mappings. It allows the user to choose between 4 different room ventilation modes:
Off = Fan off. N.B. Mode only available for models that have this setting option.
Quiet = Fan speed is reduced for noise reduction (compared to Regular).
Regular = Default configuration.
Boost = Fan speed is increased compared to Regular in order to maximise ventilation air flow.

INTEGRAZIONE DOMOTICA “ALEXA”

With this extra feature, the stove can be controlled via the “Alexa” (Amazon) voice assistant. This operation requires an Internet connection + the new Total Control 3.0 app: therefore, the product must have the “Grey” module or have this function integrated in the board/display set up for the 3.0. app.

MAKING THE RIGHT CHOICE

Think of the environment, even in your own home

When you decide to buy a wood burning range, a fireplace, a boiler or a wood or pellet burning stove, a series of factors influence your choice. La Nordica-Extraflame has provided this tool to help you find what you need.

1 Flue Pipe

Should be considered as the main element for smoke disposal. It must be built with material able to resist to high temperature, better with a circular shape, and 4 meters as minimal height without bends.

2 Connection Pipe flue


Appliance flue connection pipe must be shortest, with few horizontal parts as possible and with the same diameter of the collar pipe appliance connection.

3 Air Intake

It should be checked as correct appliance installation if do exist an external air intake big enough to offer a whole and efficient combustion.


4 Chimney

Put on the top, it must have the same internal section of the chimneypot, while the exit one must be twice compared to the flue pipe diameter to guarantee the residual combustion disposals and protecting against environment.



5 Canalization

It is always important to assess the maximum air-ductable distances of the installed product.



6 Thermo products

By choosing what thermo product to install, specific individual needs have to be considered in addition to a meticulous assess of the global thermal power needed by the heating system and of the installation place.



7 Heatable m³

The data is indicative. For the generator to be sized correctly, contact a skilled technician/designer. The total volume to heat, the thermal building insulation grade, the sun exposure and the climatic zone have to be determined in order to make the



best choice about the fireplace or stove to install. This is the only way to quantify the environmental needed heat.

| Nominal power kW | m³ to heat |
|------------------|-----------------|
| 5 - 8 | 150 - 200 circa |
| 8 - 12 | 200 - 300 circa |
| 12 - 20 | 300 - 500 circa |

Referred to the need of 30 kcal/h x m³

PELLET PRODUCTS INDEX

| Page no. | Article description | DM186 | CT 2.0 (Coefficiente premiante) | Flamme Verte | DTA | BlmSchV | 15a B-VG | Ecodesign |
|----------|--------------------------|-------|------------------------------------|--------------|-----|---------|----------|-----------|
| 3 | AMIKA | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ | ✓ |
| 6 | ANNABELLA AD EVO | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 11 | COMFORT IDRO L80 | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 10 | COMFORT P70 AIR | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 10 | COMFORT P70 AIR H49 | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 11 | COMFORT P70 AIR PLUS | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 11 | COMFORT P85 | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 11 | COMFORT P85 PLUS | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 9 | COSTANZA IDRO | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 4 | DAHIANA VFS | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 6 | DAHIANA PLUS VFS | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 10 | DIADEMA IDRO EVO | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 2 | GIUSY EVO 2.0 | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 5 | GIUSY PLUS EVO 2.0 | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 9 | ISIDE IDRO H15 | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 2 | KETTY EVO 2.0 | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 3 | KLAUDIA | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 5 | KLAUDIA PLUS | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 4 | LUCIA | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 7 | LUCIA PLUS | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 2 | LUISELLA | ★★★★ | 1,2 | 7★ | | ✓ | ✓ | ✓ |
| 5 | MARILENA PLUS AD | ★★★★ | 1,5 | 7★ | ✓ | ✓ | | ✓ |
| 6 | MARILENA PLUS AD CRYSTAL | ★★★★ | 1,5 | 7★ | ✓ | ✓ | | ✓ |
| 8 | MARINA IDRO H11 | ★★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 8 | MARINA IDRO H13 | ★★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 12 | PK15 | ★★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 12 | PK20 | ★★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 12 | PK30 | ★★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 9 | RAFFAELLA IDRO H15 | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 9 | RAFFAELLA IDRO H18 | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 3 | SERAFINA LUX EVO | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 3 | SERAFINA PETRA EVO | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 7 | SOUVENIR LUX EVO | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 6 | SOUVENIR STEEL EVO | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 7 | SOUVENIR PETRA EVO | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 4 | TEODORA EVO | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 4 | TEOREMA | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 7 | TEOREMA PLUS | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 8 | VIRNA IDRO | ★★★★ | 1,2 | 7★ | | ✓ | ✓ | ✓ |

PELLET PRODUCTS INDEX

| Page no. | Article description | DM186 | CT 2.0 (Coefficiente premiante) | Flamme Verte | DTA | BlmSchV | 15a B-VG | Ecodesign |
|----------------------|---------------------|-------|------------------------------------|--------------|----------------------------------------------|---------|----------|-----------|
| PRESTIGE LINE | | | | | | | | |
| 22 | ANGELA EVO | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ | ✓ |
| 27 | ANGELA PLUS EVO | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ | ✓ |
| 19 | ANGY TOP | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ | ✓ |
| 25 | DEBBY | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ | ✓ |
| 30 | DEBBY PLUS EVO | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ | ✓ |
| 29 | GABRIELLA PLUS | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ | ✓ |
| 21 | ILARY | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ | ✓ |
| 28 | ILARY PLUS TOP | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ | ✓ |
| 16 | LINA TOP | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ | ✓ |
| 20 | MIRKA | ☆☆☆☆☆ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 26 | MIRKA PLUS | ☆☆☆☆☆ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 18 | MOIRA EVO | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ | ✓ |
| 23 | PAMELA STEEL | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ | ✓ |
| 24 | PAMELA CRYSTAL | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ | ✓ |
| 15 | PEGGY | | | | ** Provisional data in phase of homologation | | | |
| 33 | ROSANNA IDRO | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 17 | SABRY 5.0 | ☆☆☆☆☆ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 31 | SHARON PLUS | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ | ✓ |
| 32 | SHARON PLUS STEEL | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ | ✓ |

PELLET PRODUCTS INDEX

| Page no. | Article description | DM186 | CT 2.0 (Coefficiente premiante) | Flamme Verte | DTA | BlmSchV | 15a B-VG | Ecodesign |
|-----------------------|----------------------|-------|------------------------------------|--------------|----------------------------------------------|---------|----------|-----------|
| EVOLUTION LINE | | | | | | | | |
| 43 | ANNALISA PLUS | | | | ** Provisional data in phase of homologation | | | |
| 51 | EVELYNE IDRO 2.0 | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 50 | GUENDA IDRO | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 52 | ISIDORA IDRO H16 | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 53 | ISIDORA IDRO H20 | ★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 54 | ISIDORA IDRO H23 5.0 | ★★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 38 | KATIA 11 | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ | ✓ |
| 37 | KATIA 9 | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ | ✓ |
| 48 | MARGARET | | | | ** Provisional data in phase of homologation | | | |
| 36 | MIETTA EVO | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ | ✓ |
| 40 | NORIS | ★★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ | ✓ |
| 41 | NORIS LUX | ★★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ | ✓ |
| 44 | NORIS PLUS | ★★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ | ✓ |
| 45 | NORIS PLUS LUX | ★★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ | ✓ |
| 56 | PR20 | ★★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 57 | PR30 | ★★★★★ | 1,5 | 7★ | | ✓ | ✓ | ✓ |
| 39 | SINFONY | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ | ✓ |
| 46 | TERRY PLUS | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ | ✓ |

WOOD-BURNING PRODUCTS INDEX

| Page no. | Article description | DM186 | CT 2.0 (Coefficiente premiante) | Flamme Verte | BlmSchV | 15a B-VG | Ecodesign |
|----------|----------------------------------------|-------|------------------------------------|--------------|---------|----------|-----------|
| 65 | ASIA BII | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 62 | BRIGITTA GB | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 62 | CANDY 4.0 | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ |
| 61 | CONCITA 2.0 | ☆☆☆☆☆ | 1,5 | 7★ | ✓ | ✓ | ✓ |
| 61 | CONCITA 2.0 - STEEL | ☆☆☆☆☆ | 1,5 | 7★ | ✓ | ✓ | ✓ |
| 60 | EMILIANA | ☆☆☆☆☆ | 1,5 | 7★ | ✓ | ✓ | ✓ |
| 60 | EMILIANA - STEEL | ☆☆☆☆☆ | 1,5 | 7★ | ✓ | ✓ | ✓ |
| 66 | ESTER BII | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 66 | ESTER FORNO EVO | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ |
| 70 | FAMILY 4,5 | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 60 | FEDORA | ☆☆☆☆☆ | 1,5 | 7★ | ✓ | ✓ | ✓ |
| 61 | FEDORA - STEEL | ☆☆☆☆☆ | 1,5 | 7★ | ✓ | ✓ | ✓ |
| 66 | GEMMA | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 66 | GEMMA FORNO 5.0 | ☆☆☆☆☆ | 1,5 | 7★ | ✓ | ✓ | ✓ |
| 62 | GIULIETTA X 4.0 | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 80 | INSERTO 100 WIDE | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 78 | INSERTO 60 4.0 - VENTILATO | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 79 | INSERTO 70 4.0 - VENTILATO | ★★★★ | | 7★ | ✓ | | ✓ |
| 78 | INSERTO 70 H49 4.0 - VENTILATO | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 78 | INSERTO 70 L 4.0 - VENTILATO | ★★★★ | | 7★ | ✓ | | ✓ |
| 80 | INSERTO 70 PRS WIDE | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ |
| 80 | INSERTO 70 WIDE | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ |
| 79 | INSERTO 80 CRYSTAL EVO 2.0 - VENTILATO | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 79 | INSERTO 80 HIGH PRESSURE | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 79 | INSERTO 80 PRS CRYSTAL - VENTILATO | ★★★★ | 1,2 | 7★ | ✓ | ✓ | ✓ |
| 80 | INSERTO 80 WIDE 2.0 | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 63 | ISETTA CON CERCHI EVO 4.0 | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 63 | ISETTA EVO 4.0 | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 64 | ISOTTA CON CERCHI EVO | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 64 | ISOTTA FORNO EVO | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ |
| 64 | ISOTTA EVO | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 63 | JENNIFER 2.0 | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 69 | LORIE S DSA | ★★★★ | 1,2 | | ✓ | ✓ | ✓ |
| 63 | MARLENA | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ |
| 81 | MONOBLOCCO 800 ANGOLO DX | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 81 | MONOBLOCCO 800 ANGOLO SX | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 69 | NORMA S IDRO DSA | ★★★★ | | | ✓ | | ✓ |
| 72 | ROSA 5.0 - CERAMICA | ☆☆☆☆☆ | | 7★ | ✓ | ✓ | ✓ |
| 73 | ROSA 5.0 - MAIOLICA | ☆☆☆☆☆ | | 7★ | ✓ | ✓ | ✓ |

WOOD-BURNING PRODUCTS INDEX

| Page no. | Article description | DM186 | CT 2.0 (Coefficiente premiante) | Flamme Verte | BlmSchV | 15a B-VG | Ecodesign |
|----------|----------------------------------|-------|------------------------------------|--------------|---------|----------|-----------|
| 73 | ROSA 5.0 - PETRA | ★★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 73 | ROSA 5.0 - STEEL | ★★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 74 | ROSA L 5.0 - STEEL | ★★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 72 | ROSA REVERSE 2.0 | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 72 | ROSA SINISTRA REVERSE | ★★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 74 | ROSA XXL 5.0 - MAIOLICA | ★★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 74 | ROSA XXL 5.0 - PETRA | ★★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 74 | ROSA XXL 5.0 - STEEL | ★★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 70 | ROSETTA 5.0 - CERAMICA | ★★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 71 | ROSETTA 5.0 - MAIOLICA | ★★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 71 | ROSETTA 5.0 - PETRA | ★★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 71 | ROSETTA SINISTRA 5.0 - CERAMICA | ★★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 71 | ROSETTA SINISTRA 5.0 - PETRA | ★★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 72 | ROSETTA SINISTRA 5.0 - STEEL | ★★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 67 | ROSSELLA PLUS FORNO EVO | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ |
| 67 | ROSSELLA R1 BII | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 70 | SOVRANA EASY EVO 2.0 | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 65 | SUPER JUNIOR | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 73 | SUPREMA 4.0 | ★★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 65 | TEA | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 82 | TERMOCAMINO WF PLUS DSA | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ |
| 68 | TERMOISOTTA DSA | ★★★★ | | | ✓ | | ✓ |
| 77 | TERMOROSA DSA | ★★★ | | 7★ | ✓ | ✓ | ✓ |
| 77 | TERMOROSA XXL DSA | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 68 | TERMOROSSELLA PLUS EVO DSA 4.0 | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ |
| 68 | TERMOROSSELLA PLUS FORNO DSA 4.0 | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ |
| 77 | TERMOVRANA DSA | ★★★ | | 7★ | ✓ | | ✓ |
| 76 | VENEZIA | ★★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 75 | VERONA XXL | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 75 | VERONA XXL - MAIOLICA | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 76 | VERONA XXL - PETRA | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| 75 | VICENZA EVO | ★★★★ | | 7★ | ✓ | ✓ | ✓ |

WOOD-BURNING PRODUCTS INDEX

| Page no. | Article description | DM186 | CT 2.0 (Coefficiente premiante) | Flamme Verte | BlmSchV | 15a B-VG | Ecodesign |
|-----------------------|----------------------|-------|------------------------------------|----------------------------------------------|---------|----------|-----------|
| PRESTIGE LINE | | | | | | | |
| | ALASKA | ★★★★★ | | 7★ | ✓ | ✓ | ✓ |
| | DANTE | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ |
| | DANTE CON PORTALEGNA | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ |
| | GARDENIA 5.0 | ★★★★★ | | 7★ | ✓ | ✓ | ✓ |
| | LIÙ | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ |
| | LIÙ - PIETRA | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ |
| | MILLY | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| | MONOBLOCCO 3LC | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| | MONOBLOCCO 90PA 2.0 | ★★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ |
| | NOVA FORNO | ★★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ |
| | NOVA FORNO - STEEL | ★★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ |
| | SIERRA | | | ** Provisional data in phase of homologation | | | |
| | TAHITI | ★★★★ | | 7★ | ✓ | ✓ | ✓ |
| | TAHITI EPS | ★★★★ | 1,5 | 7★ | ✓ | ✓ | ✓ |
| EVOLUTION LINE | | | | | | | |
| | LARISSA | | | ** Provisional data in phase of homologation | | | |

CERTIFICATES



Italian Regulation for the Environmental Certificate release of domestic solid fuels biomass room heaters (Classification from 1 up to 5 stars).

BImSchV

German regulations on controlling emissions.



Only for Italy: the Ministerial Decree 28/12/12, better known as “Conto Termino”, allows a specific incentive in case of replacement of old appliances by new ones with certain characteristics

15a B-VG

Compliance with article 15 of the Austrian federal constitutional law on environmental protection measures.



French trademark of the ADEME agency for the environment and the energy. The products “Flamme Verte” approved guarantee the best high energy performances and respect for the environment.

ECODESIGN

European certification defining the ecodesign guidelines for biomass products.



Certification issued by the French Scientific and Technical Building Centre – CSTB – for watertight devices tested in watertight installation conditions.

MFB

Only for Germany: The products is ready to be connected to a multiply chimney connection , just when the installation is made in accordance with requirements of the regional and national standards, and when observed the norms DIN EN 13384-2, DIN V 1816-1, DIN 18896 and MFeuV-2007 (Muster-Feuerungsverordnung), and that the district chimney sweeper has checked and approved the correct installation.



Certification issued by the German Federal Office for Economics and Export Control to promote the efficient use of biomass energy.

LEGEND, ENERGY LABEL, COLOURS AND NOTE

LEGEND

kW-N: Nominal thermal power (kW)
kW-H₂O: Power given back to water (kW)
m³: Heatable m³ (30 kcal/h x m³)
%: Efficiency (%)
kg/ℓ: Tank total capacity (kg-ℓ)
kg/h: Hourly consumption (kg/h)
Ø mm: Smoke outlet diameter (mm)
T = Top
B = Back
RH Side = Right side
LH Side = Left side

Dim. WxHxD: Dimensions WxHxD (mm)
kg: Net weight (kg)
W: Electric consumption (W)
bar: Working pressure (bar)
Oven capacity: Oven size (ℓ)




AIR-TIGHT: Air-tight combustion chamber
 and tank: technology and innovation at the
 service of your safety.

ENERGY LABEL

The energy label for the biomass products.

From 1st January 2018 the Energy Labelling Regulation comes into force also for all the biomass heating appliances, both roomheater appliances and appliances designed to heat the water for central heating and domestic hot water. This directive, in accordance with the regulations of the European Union, will assign an Energy Efficiency Class (from G up to A++) providing the buyers with information about the consumption and the efficiency.



COLOURS

| | |
|-------------|----------------|
| AVOR | Ivory |
| AGAT | Agate Grey |
| BIAN | White |
| BIIN | White Infinity |
| BIPU | Dotted White |
| BORD | Bordeaux |
| BRNZ | Bronze |
| BRWN | Brown |
| CAPP | Cappuccino |
| FUME | Smoked |
| GRLC | Grigio Luce |
| INOX | Inox |
| MASF | Soft Brown |

| | |
|-------------|---------------------|
| NEVT | Glazed Black |
| NERO | Black |
| NEAN | Anthracite Black |
| PANN | Panna |
| PERG | Parchment |
| NATU | Natural Stone |
| SVAM | Silk Vogue Ametista |
| TITA | Titanium |
| TOMA | Matt Taupe |
| TORT | Taupe |
| VERD | Green |
| VGAM | Amethyst |
| VLCN | Vulcan |

NOTE

Note: Before the purchase, ask to your reseller all the information regarding the appliance. One must also bear in mind all laws and national, regional, provincial and town council Standards present in the country in which the appliance has been installed, as well as the instructions contained in this manual.

- The images contained in this document are for product illustration purposes only and do not represent indications for the performance or technical characteristics of the same.
- La Nordica products must be connected to chimneys having a draught between 10 Pa and 17 Pa as indicated by the instruction manual which is supplied along with any product. The Thermoproducts must be connected to chimneys with a draught between 17 Pa and 20 Pa.
- Due to printing reasons the reproduction of colours has to be considered only indicative.
- The fuel quantity (weight) inside the tank and the hour consumption can change depending on the type of pellet which is used.
- All the figures were measured using approved pellets in compliance with EN ISO 17225-2.
- The data in the catalogue can be rounded off to the first decimal.
- Facing tones and characteristics are subject to slight variations because they are natural products.

- The manufacturer reserves the right to modify products without giving advance notice.
- The La Nordica-Extraflame products can be covered by industrial property rights (such as patents, designs and trademarks) owned by La Nordica-Extraflame exclusively. It is strictly forbidden to violate these rights as for removing, cancelling or corrupting the trademarks impressed on the products and impressing others.
- Due to its nature, natural stone material, such as marble, is subject to aesthetic variations in shade, colour and grain pattern when comparing one piece to another and also to a sample. Therefore, any differences are to be considered particular characteristics and distinctive elements of the material itself that certify the uniqueness, which is the absolute value of this type of product.
- La Nordica-Extraflame products are approved to work with 230V 50Hz power supply only. The use with different voltages and / or frequencies supply can compromise the functionality and safety of the products.



FEELING COSY AT HOME
A natural choice

 **NORDICA**[®]
Extraflame
Warms up your life.





La Nordica S.p.A. (Wood products)

Via Summano, 104 • 36030 Montecchio Precalcino - Vicenza - Italy

Tel. +39 0445 804000

info@lanordica.com

Extraflame S.p.A. (Pellet products)

Via dell'Artigianato, 12 • 36030 Montecchio Precalcino - Vicenza - Italy

Tel. +39 0445 865911

info@extraflame.it

www.lanordica-extraflame.com

9300222-001

